

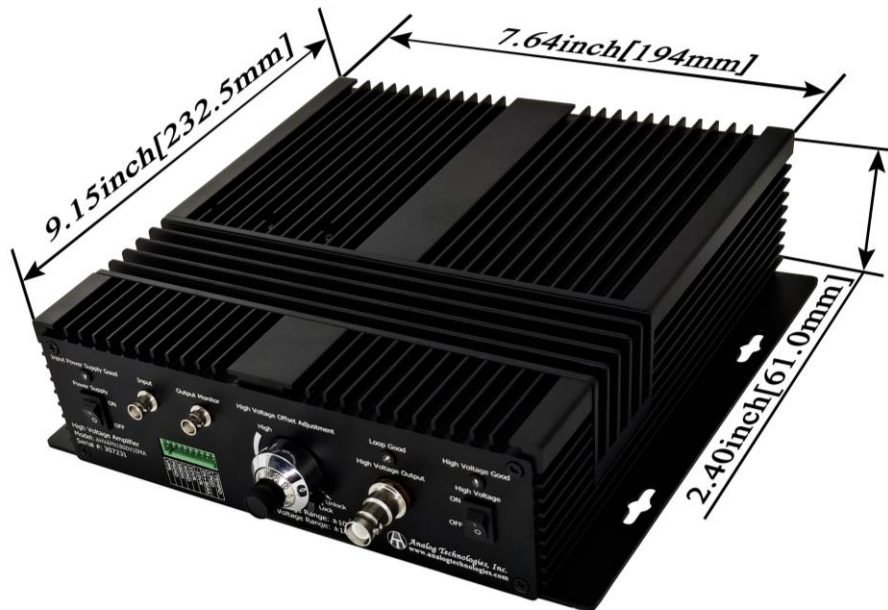


Figure 1A. 3D View



Figure 1B. Top and Front View



Figure 1D. Back View



Figure 1C. Top and Side View

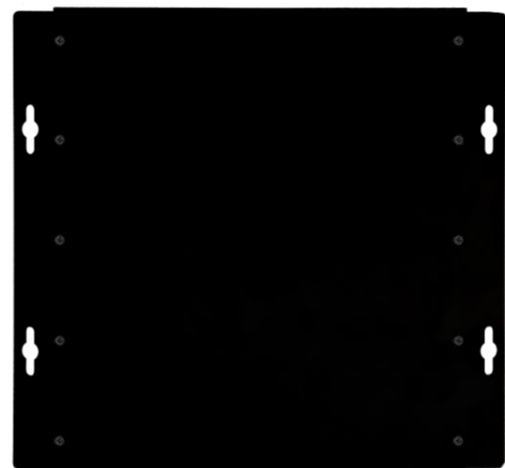


Figure 1E. Bottom View



FEATURES

- Built-in High Voltage Power Supply
 - Compact Size: 9.15(L)×9.05(W)×2.4(H) inch
232.5(L)×230(W)×61(H) mm
 - Bi-directional Output: $\pm 1800V$
 - High Current Capability: Up to 10mA
 - High Slew Rate: 1200V/ μs @open load
540V/ μs @250pF load
 - Input Signal Voltage Range: $\pm 10V$
 - Adjustable Bias Voltage Range: $-10V \sim 10V$
 - Combined Control Voltage Range*: $-10V \sim 10V$
 - Bandwidth: Up to 3kHz
- *: Input Signal + Bias voltage = Combined Control Voltage

This high voltage amplifier can be used for driving high voltage loads, including: piezoelectric transducers, mass spectrometers, electrostatic precipitators, electrophoresis experiments, high voltage storage capacitors, etc.

WARNINGS

1. Never touch the high voltage output by hand.
2. Do not place any foreign objects on the face plate.
3. Never connect the high voltage output to the low voltage side connectors. Keep them at least 2 inch (50mm) apart.
4. Before connecting or disconnecting high voltage output, make sure to turn off the amplifier power.

APPLICATIONS


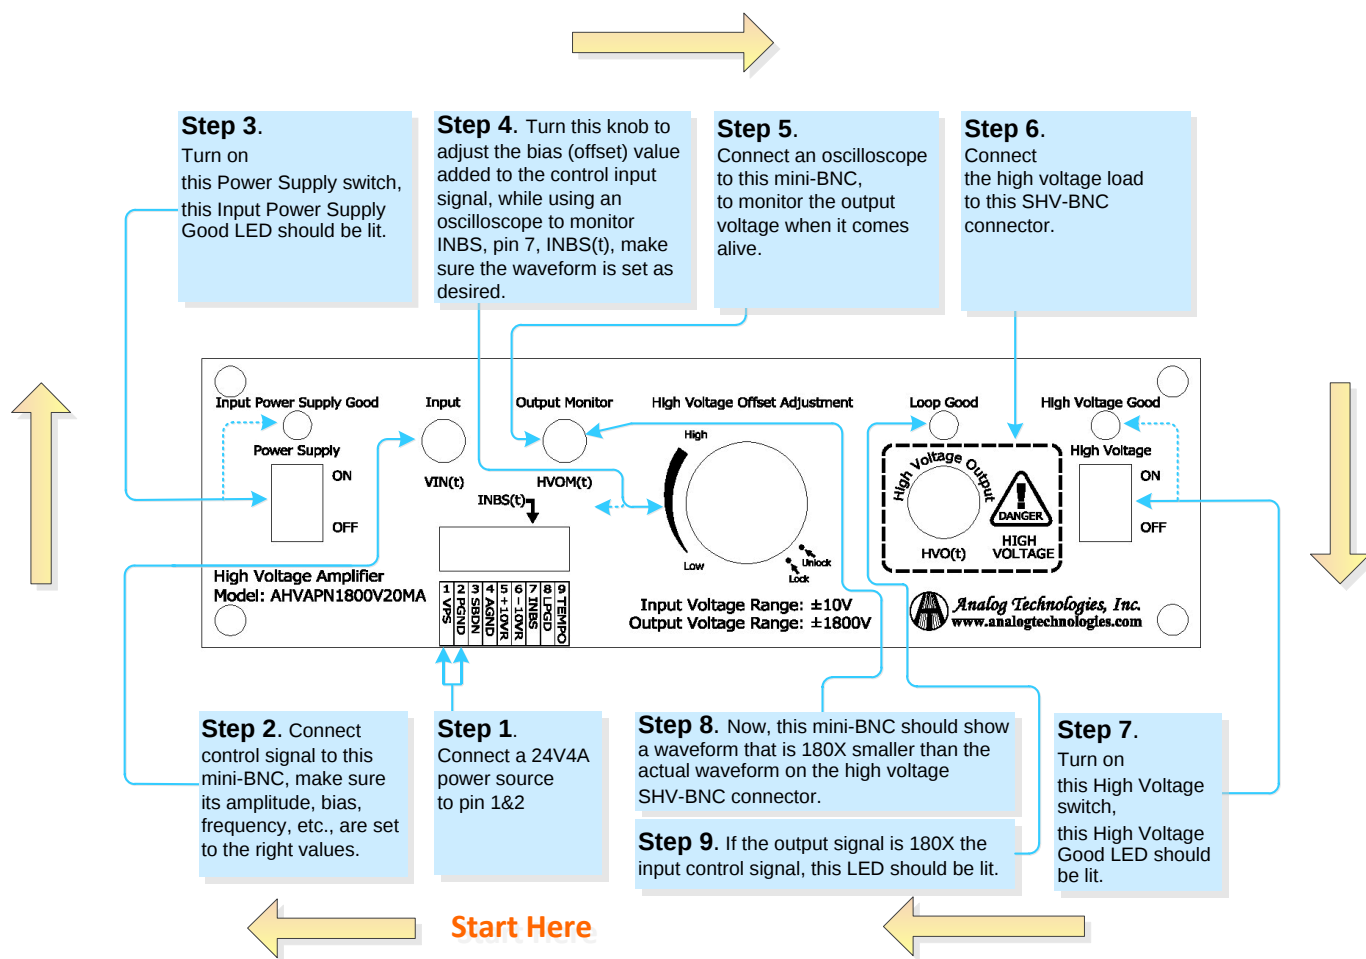


Figure 2. Operation Steps



AHVAPN1800V10MA



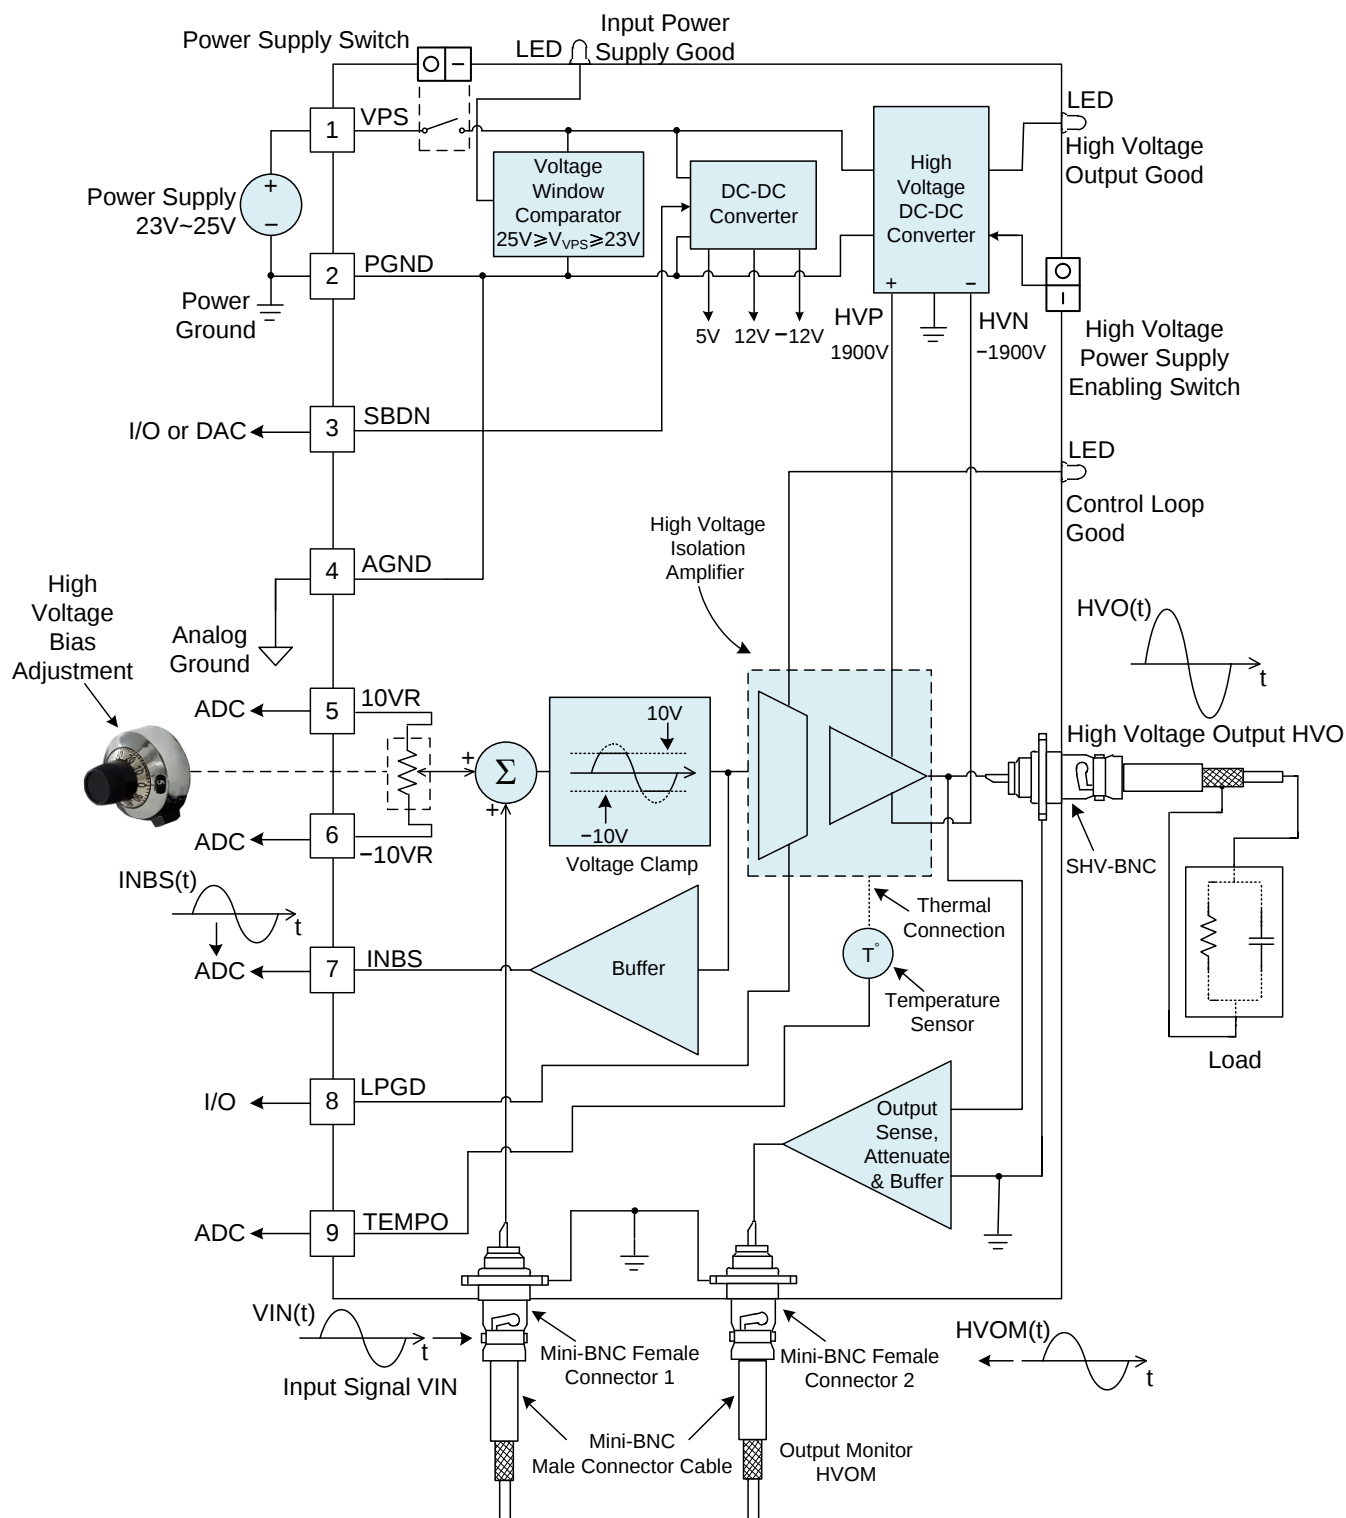

DESCRIPTION

The AHVAPN1800V10MA is an electronic module for amplifying an analog input voltage into a high voltage output. Figure 1 shows its photos. It comes with a high voltage DC-DC converter, which converts the 24V input voltage into two output voltages: -1900V and +1900V. The analog input voltage, $V_{IN}(t)$, can be from -10V to +10V, the corresponding output voltage,

$HVO(t)$, is from -1800V to +1800V. There are three LEDs indicating: 24V power supply is present and within an appropriate window: 23V to 25V, the high voltage power supply is outputting $\pm 1900V$ outputs properly, and the control loop works properly, i.e. $HVO(t) = 180 \times V_{IN}(t)$.

Table 1. Terminal Block Pin Functions

Pin #	Name	Type	Description
1	VPS	Power Input	Power supply 24V $\pm$ 1V.
2	PGND	Power Ground	Ground pin for Power Supply Input.
3	SBDN	Digital Input	This is a duplex pin. It sets the amplifier into Off, Standby or On mode.
4	AGND	Signal Ground	Signal ground pin. Connect ADC and DAC grounds to here.
5	10VR	Analog Output	10V voltage reference.
6	-10VR	Analog Output	-10V voltage reference.
7	INBS	Analog Output	Combined control voltage. It is derived from input signal, INPUT, plus the bias voltage set by the potentiometer (see Figure 2), and clipped to $\pm 10V$. When going from -10V to 10V, the output voltage will be from -1800V to 1800V.
8	LPGD	Digital Output	Loop Good indication. It means the output voltage is correctly proportional to the combined control voltage at pin 7.
9	TEMPO	Analog Output	A voltage represents the actual amplifier internal temperature.
BNC 1	INPUT	Analog Input	A signal voltage to be amplified into high voltage swing at the output. When going from -10V to 10V, the output voltage should change from -1800V to 1800V.
BNC 2	Output Monitor	Analog Output	Output voltage indication. When going from -10V to 10V, it indicates the output voltage is from -1800V to 1800V.
BNC 3	VOUT	Analog Output	Output voltage for driving the load.



SPECIFICATIONS

Table 2. Characteristics (Test ambient temperature $T_A = 25^\circ\text{C}$)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Power Supply Input (Pin 1&2)						
Input Range	V_{VPS}		23	24	25	V
Input Current	I_{IN}		0		4	A
Maximum Input Power				100		W
Voltage Output (BNC3)						
Output Voltage	V_{OUT}		-1800		1800	V
Output Current	I_{OUT}		0		10	mA
Maximum Slew Rate		open load		1200		V/ μs
		250pF load		540		V/ μs
SBDN Pin (Pin 4)						
Off State	$V_{SBDN-OFF}$		0		0.4	V
	$V_{SBDN-OFF-HI}$ Going up from Off to Standby threshold voltage				2.1	V
	$V_{SBDN-OFF-LOW}$ Going down from Standby to Off threshold voltage		0.4			V
SBDN State	$V_{SBDN-STANDBY}$		2.1		2.5	V
	$V_{SBDN-SB-HI}$ Going up from Standby to On threshold voltage		2.508		2.64	V
	$V_{SBDN-SB-LOW}$ Going down from On to Standby threshold voltage		2.5		2.6	V
On State	$V_{SBDN-ON}$		2.64		V_{VPS}	V
SBDN Current	I_{SBDN}			10	20	μA
LPGD Pin (Pin 3)						
LPGD Voltage	$V_{LPGD-LOW}$	$V_{DD} = 5\text{V}$ Sinking current = 8mA			0.6	V
	$V_{LPGD-HI}$	$V_{DD} = 5\text{V}$ Sourcing current = 3.5mA	$V_{DD} - 0.7$			V



Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
10VR/-10VR Pin (Pin 6 & Pin 7)						
Voltage Reference	V_{REF}			-10/+10		V
Voltage Reference Current Range	I_{REF}		-20		20	mA
Voltage Noise	e_{NP-p}	0.1Hz to 10Hz		117		nVp-p
Voltage Noise Density	e_N	$f = 1\text{kHz}$		9		nV/ $\sqrt{\text{Hz}}$

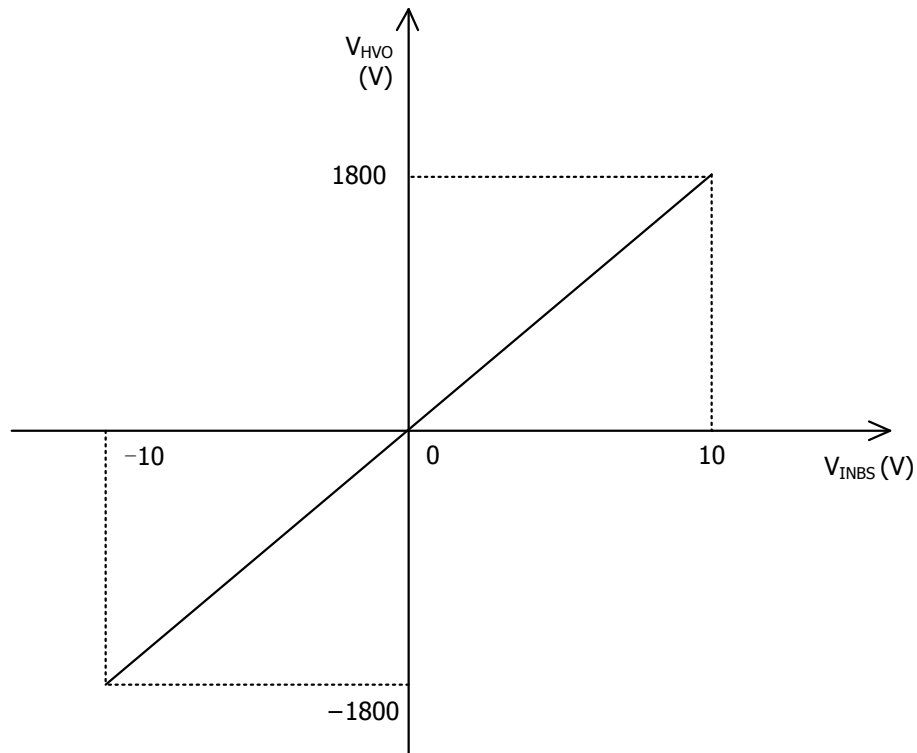


Figure 4. V_{INBS} vs. V_{HVO}

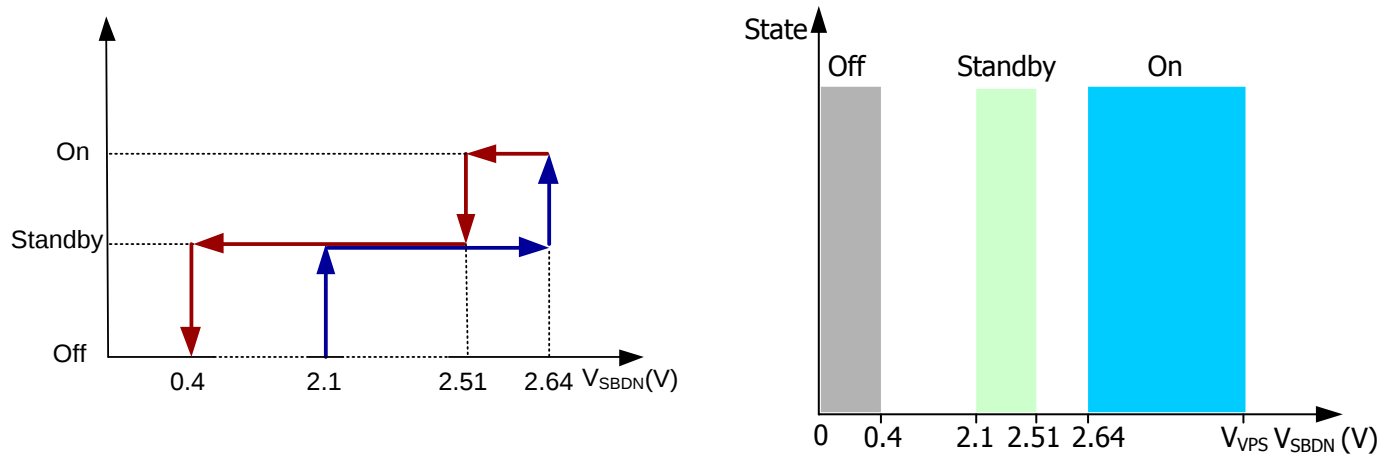


Figure 5. V_{SBDN} vs. Amplifier States



CHARACTERISTICS

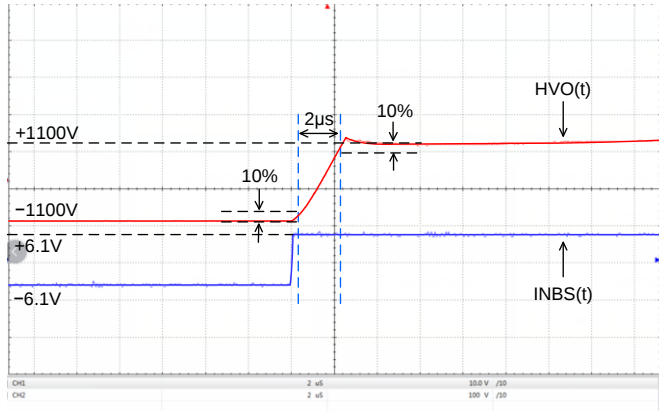


Figure 6. Input vs. Output = $\pm 1000\text{V}$ without Load

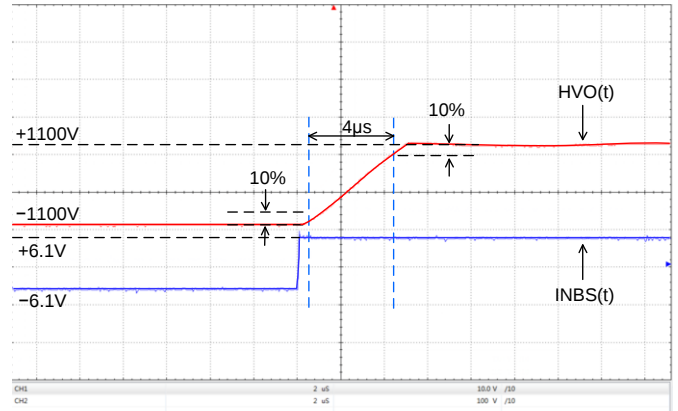


Figure 7. Input vs. Output = $\pm 1000\text{V}$ @ 250pF Load

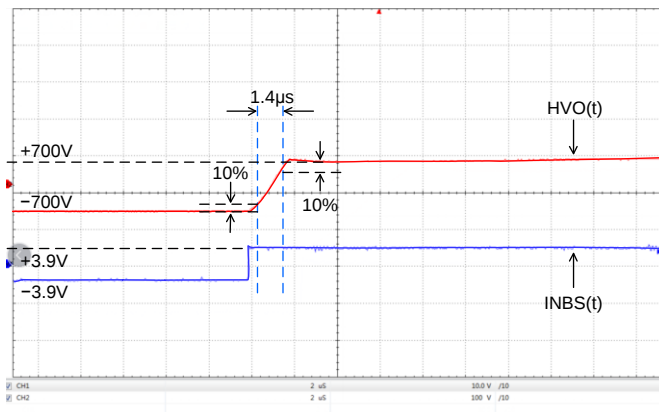


Figure 8. Input vs. Output = $\pm 700\text{V}$ without Load

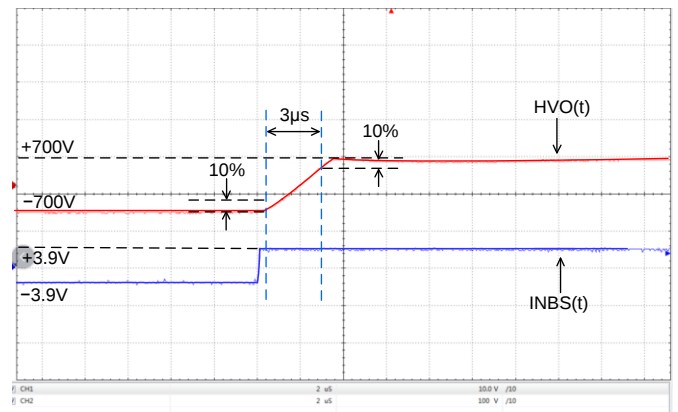


Figure 9. Input vs. Output = $\pm 700\text{V}$ @ 250pF Load

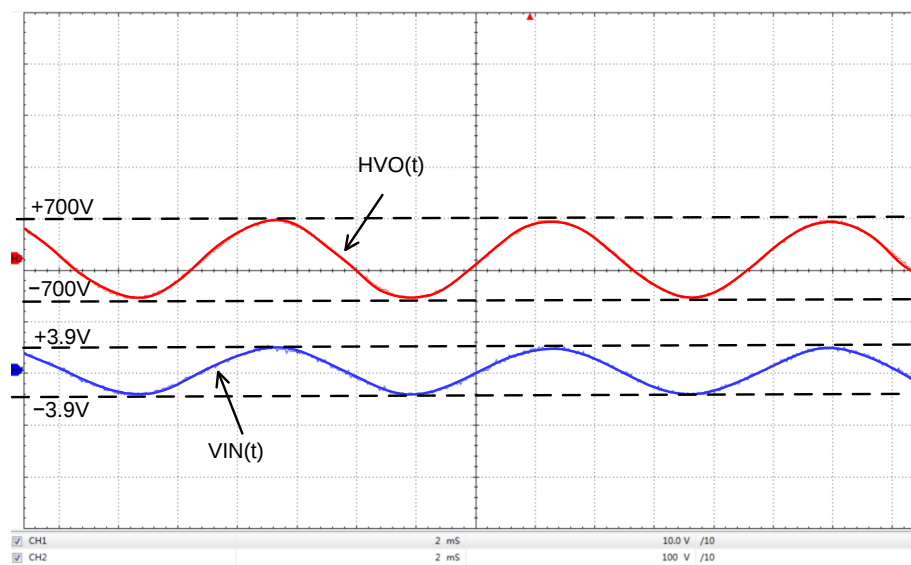


Figure 10. Input vs. Output with Sine Wave



NAMING CONVENTION

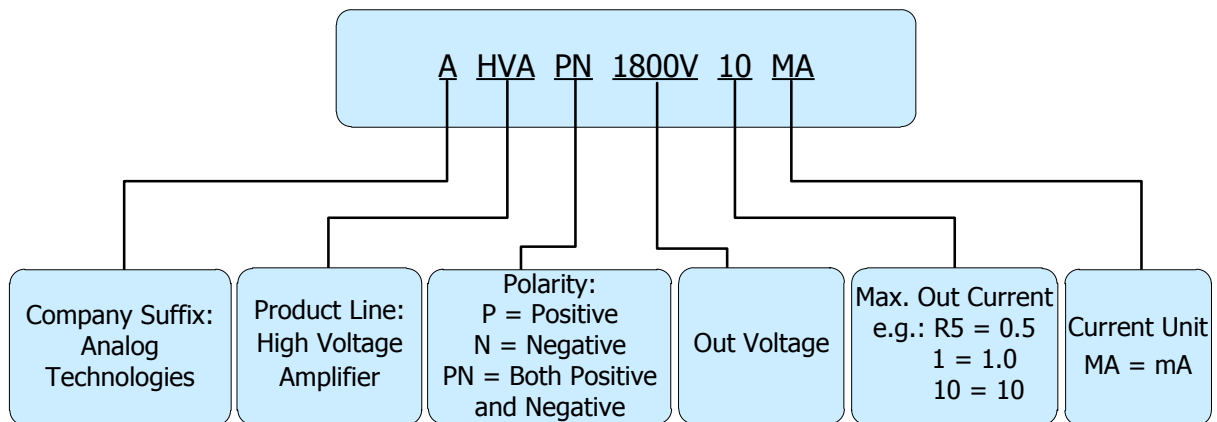


Figure 11. Naming Convention

MECHANICAL DIMENSIONS

Figure 12 shows the dimensions of this high voltage amplifier.

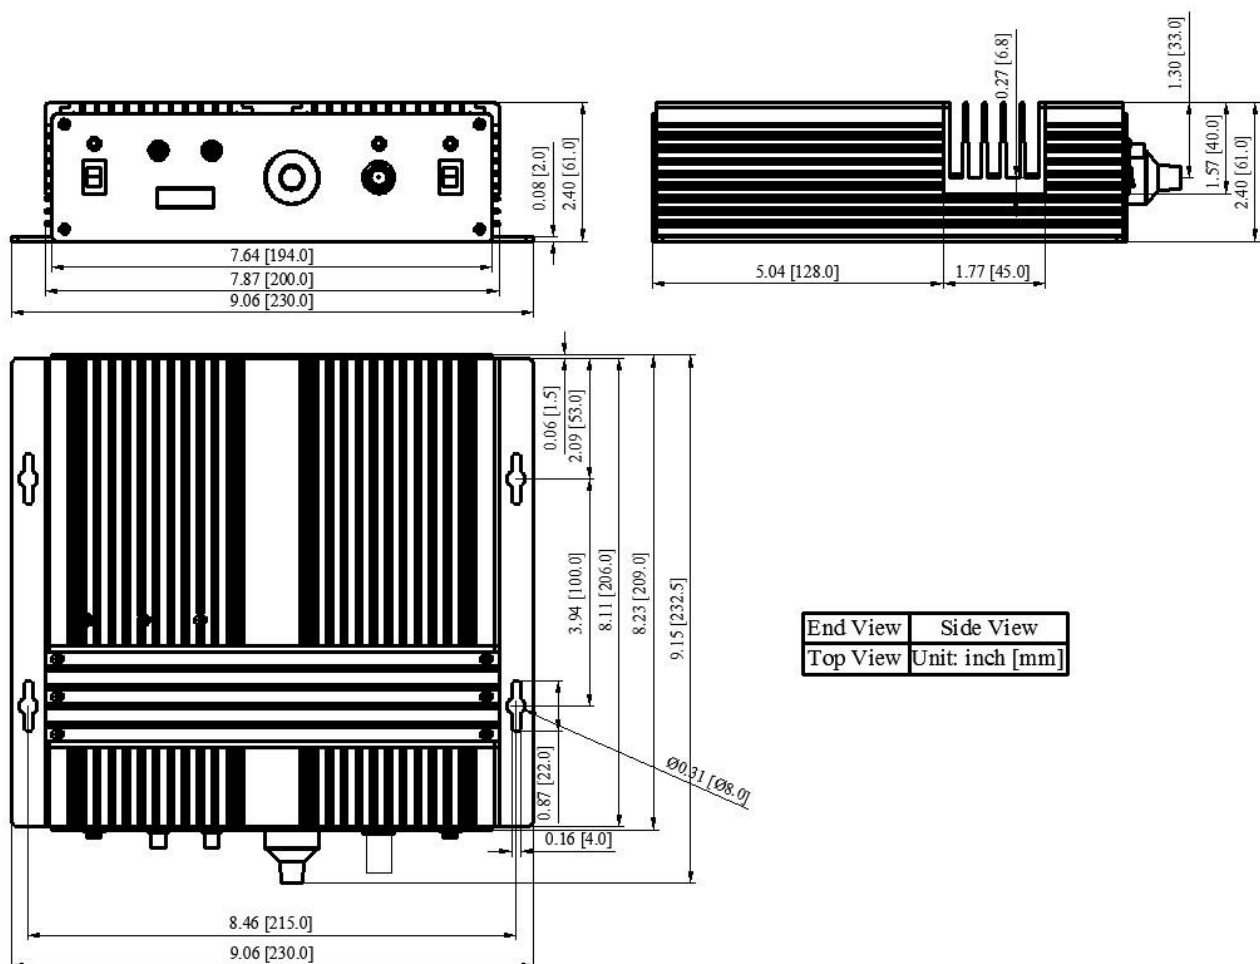


Figure 12. Dimensions of AHVAPN1800V10MA



ORDERING INFORMATION

Table 3. Ordering Information

Part Number	Buy Now
AHVAPN1800V10MA	 *  *

RELATED PRODUCTS

Table 4. Related Products

Part Number	Description
AHVAPN1800V20MA	±1800V 20mA high voltage amplifier
AHVAPN1000V10MA	±1000V 10mA high voltage amplifier
AHVAPN1000V20MA	±1000V 20mA high voltage amplifier
AHVAPN500V10MA	±500V 10mA high voltage amplifier
AHVAPN500V20MA	±500V 20mA high voltage amplifier

NOTICE

1. ATI warrants its products to perform according to specifications for one year from the date of sale, except when damaged due to excessive abuse. If a product fails to meet specifications within one year of the sale, it can be exchanged free of charge.
2. ATI reserves the right to make changes or discontinue products or services without notice. Customers are advised to obtain the latest information before placing orders.
3. All products are sold subject to terms and conditions of sale, including those pertaining to warranty, patent infringement, and limitation of liability. Customers are responsible for their applications using ATI products, and ATI assumes no liability for applications assistance or customer product design.
4. ATI does not grant any license, either express or implied, under any patent right, copyright, mask work right, or other intellectual property right of ATI.
5. ATI's publication of information regarding third-party products or services does not constitute approval, warranty, or endorsement.
6. ATI retains ownership of all rights for special technologies, techniques, and designs for its products and projects, as well as any modifications, improvements, and inventions made by ATI.