

FEATURES

- Power Supply Voltage Range: 3.1V ~ 6V
- High Efficiency: $\geq 90\%$
- Maximum Output Current: 3A
- Current Output Noise: $4.48\mu A_{p-p}@0.1Hz \sim 10Hz$
- High Stability: $\pm 8mA@3A$ for entire temperature
- Loop Good Indication
- Compact Size
- Fully shielded
- 100 % Lead (Pb)-free and RoHS Compliant

APPLICATIONS

Driving laser diodes in DPSSL, EDFA, fiber laser, direct diode laser, etc., with low noise and high efficiency.

DESCRIPTION

This laser driver, ATLS3A201D, is an electronic module designed for driving diode lasers by an up to 3A constant current with high efficiency, low noise, high stability, high reliability, zero EMI, and small package. Figure 1 shows the physical photo of the ATLS3A201D.

It provides these the functions: laser constant current control, laser current monitoring, over current and thermal protection, laser current control indication, laser diode status indication, soft start, and shut down.

It comes with a high stability low noise 2.5V voltage reference. This voltage can be used by a POT (Potentiometer), or a DAC (Digital to Analog Converter) to set the voltage on the LIS pin for programming the output current, and, at the same time, by an ADCs (Analog to Digital Converters) to measure the voltage on the LIO pin for monitoring the output current.

Warning: This module can only be soldered manually on the board by a solder iron at $< 310^{\circ}C$ ($590^{\circ}F$), it cannot go through a reflow oven process.



Figure 1. Photo of Actual ATLS3A201D

The ATLS3A201D is packaged in a 6 sided metal enclosure, which blocks EMIs (Electro-Magnetic Interferences) to prevent the driver and other electronics from interfering with each other.

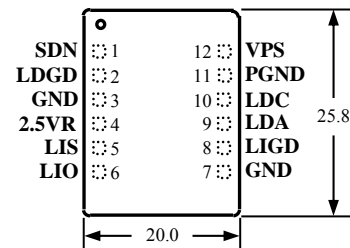


Figure 2. Pin Names and Locations

Figure 2 is the real size top view of the ATLS3A201D, which also shows the pin names and locations. Its thickness is 5mm. The pin functions are described in Table 1 below.

Table 1 Pin Function Descriptions

Pin #	Name	Type	Description
1	SDN	Digital Input	ATLS3A201D: Shut down control. Negative logic, at the internal chip control input: $>1.4V = \text{enable}$, $<0.95V = \text{shut down}$. ATLS3A201D-PD: Shut down control. Positive logic, at the internal chip control input: $<0.95V = \text{enable}$, $>1.4V = \text{shut down}$. There is a pull-down resistor of 55k to the ground.
2	LDGD	Digital Output	Laser diode good. When this pin is high, $>2V$, the control loop is working properly. When this pin is low, $<0.3V$, the laser diode is bad, or there is a short or open circuit at the laser diode.
3, 7	GND	Signal Ground	Signal ground pin. Connect the POT, DAC and/or the DAC grounds to here.

4	2.5VR	Analog Output	Reference voltage. It can source 3mA max., with $5\mu V_{p,p}$ noise between 0.1 to 10Hz and 25ppm/°C (max.) stability.
5	LIS	Analog Input	Laser current setting voltage. There is an input resistor of 10M tied to GND. Setting it from 0V to 2.5V will set the laser current from 0A to 3A linearly.
6	LIO	Analog Output	Laser current output indication. 0V to 2.5V indicates the laser current being from 0A to 3A linearly.
8	LIGD	Analog Output	Laser current good, control loop indication. When this pin is stabilized and the value is between 1V and 2.4V, the output voltage to the laser, Pin 9 LDA, will be 4.5V to 0V linearly, the laser current is stabilized, and the control loop is stable.
9	LDA	Analog Output	Laser diode anode. Connect it to the anode of the laser diode.
10	LDC	Analog Output	Laser diode cathode. Connect it to the cathode of the laser diode.
11	PGND	Power Ground	Power ground pin. Connect this pin directly to power supply return path line.
12	VPS	Power Input	Power supply voltage. The driver works from $V_{VPS} = 3.1V$ to 6V.

SPECIFICATIONS

 Table 2 Characteristics ($T_{ambient} = 25^{\circ}C$)

Parameter	Test Condition	Value	Unit
Laser driver efficiency	$I_{OUT} = 3A, V_{OUT} = 2.5V, \& V_{VPS} = 5V$	≥ 90	%
Maximum output current	$V_{LDA} \leq V_{LDAMAX}$	3	A
Output current noise ($V_{IN} = 5V; V_{OUT} = 2.5V;$ $I_{OUT} = 500mA$)	$V_{IN} = 5V; V_{OUT} = 2.5V;$ $I_{OUT} = 500mA$	4.48	$\mu A_{p,p}$ @0.1Hz- 10Hz
Stability @ 3A	The range of T_A is $20^{\circ}C \sim 80^{\circ}C$	± 0.2	%
Laser current control signal range at LIS	$V_{VPS} = 3.1V \sim 6V$	$0 \sim V_{VPS} - 0.2$	V
LIS control accuracy	Relative accuracy = (accuracy current – set point current) / set point temp.	± 0.2	%
Laser current indication signal range at LIO	$V_{VPS} = 3.1V \sim 6V$	$0 \sim 2.5$	V
LIO indication accuracy	$V_{VPS} = 3.1V \sim 6V$	± 0.2	%
Reference voltage	$V_{VPS} = 3.1V \sim 6V$	2.5	V
Reference Voltage temperature co efficiency	$V_{VPS} = 3.1V \sim 6V$		
Output voltage range at LDA	$V_{VPS} = 3.1V \sim 6V$	Depending on V_{VPS}	V
PWM frequency		500	kHz
Power supply voltage range		$3.1 \sim 6$	V
Maximum power supply voltage	–	6	V
Start-up time		4	ms
Typical pull-down current at LDGD		6	mA
Operating case temperature	$I = 3A, V_{IN} = 3.3V$ or $5V, V_{OUT} = 2.5V$	$-40 \sim 85$	°C
Rise times of small signal	$I_{OUT} = 3A, V_{OUT} = 2.5V, \& V_{VPS} = 5V$	70	μS
Fall times of small signal	$I_{OUT} = 3A, V_{OUT} = 2.5V, \& V_{VPS} = 5V$	70	μS
Rise times of large signal		352	μS
Fall times of large signal		184	μS

OPERATION PRINCIPLE

The block diagram of the driver is shown in Figure 3. The shut down control circuit accepts signals from 3 sources: external shut down, over current and over temperature signals. When any of these signals is activated, the driver is shut down. Only when none all these 3 signals is activated, a soft start circuit starts enabling the driver stage.

The soft start circuit increases the output current slowly at the start up time and shuts down the current quickly. Thermal shutdown circuit turns the driver off if the junction temperature exceeds 150°C. The driver is released from shutdown automatically when the junction temperature decreases to 10°C below the thermal shutdown trip point, and starts up under control of the soft start circuit. The over current protection circuit turns the driver off if the output current exceeds 10A @ $V_{VPS}=3.1V$ or 12A @ $V_{VPS}=6V$.

The high stability low noise 2.5V voltage reference is

provided for setting the output current by setting the LIS' voltage, and can also be used for the ADCs and/or DACs.

The laser diode status indication circuit monitors laser diode status. When LDGD pin is high, >2V, the control loop is working properly; when this pin goes low, <0.3V, the laser diode is bad, or there is a short or open circuit at the laser diode.

The laser current control indication circuit shows the driving status for the output current. When this voltage is between 0.2V to 1.8V, the output voltage on the laser diode is between 4.8V to 0V.

The current measurement circuit monitors the output current and shuts down the driver upon detecting the output current exceeds the pre-set value. It also provides a signal, LIO, indicating the actual laser diode current. The relationship is:

$$\text{Laser current} = 1.2 \times V_{LIO} \text{ (A)}$$

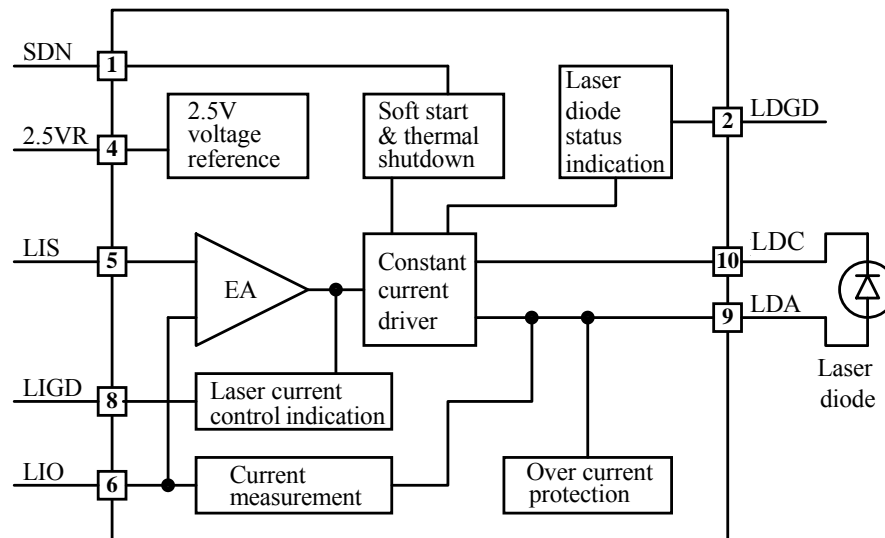


Figure 3. Block Diagram

APPLICATION INFORMATION

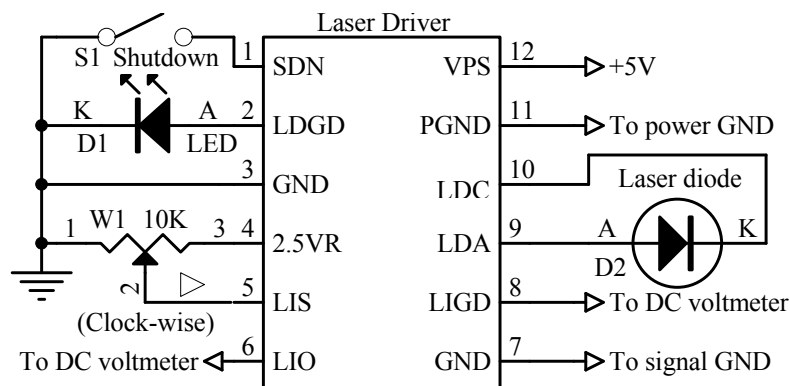


Figure 4.1. A Typical Stand-alone Application Schematic for ATLS3A201D

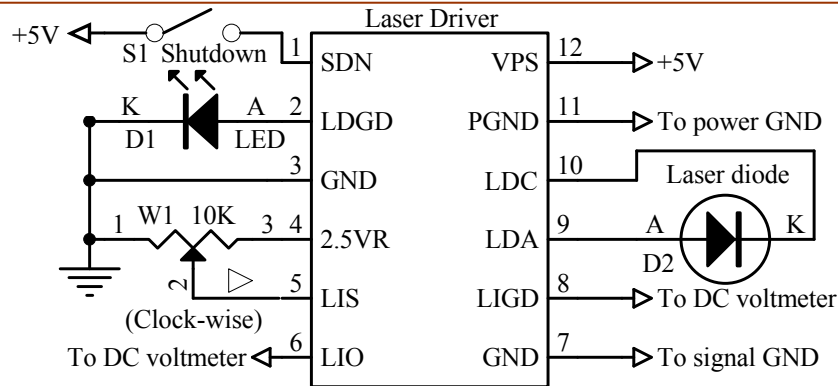


Figure 4.2. A Typical Stand-alone Application Schematic for ATLS3A201D-PD

Figure 4.1 and 4.2 shows a typical stand-alone application circuit.

In Figure 4.1, the switch S1 is an external shut down switch, it turns the driver off and on by tiding SDN pin to the ground or releasing it respectively. In Figure 4.2, the switch S1 is an external shut down switch, which turns the driver off and on by tiding SDN pin to VPS or releasing it respectively. The starting up time delay is about 4mS and the shut down time is about 20µS.

The switch S1 can also be an electronic switch, such as an I/O pin of a micro-driver, with an either open drain or push/pull output. See Figure 5. For ATLS3A201D, the internal equivalent circuit is a resistor of 10M pulling up this pin to VPS rail. And for ATLS3A201D-PD, the internal equivalent circuit is a resistor of 55k pulling down this pin to GND. When this pin voltage is >1.4V, the driver is enabled; <0.95V, the driver is shut down. Normal threshold voltage = 1.2V.

If not using a switch (S1) to control the laser, leave the SDN pin unconnected.

In Figure 4.1, the LED D1 is used to indicate laser diode status. When LDGD pin is high, >2V, the laser diode control loop is working properly. When LDGD pin is low, <0.3V, the laser diode is bad, or there is a short or open circuit at the laser diode. The LDGD pin can also be connected to a digital input pin of a micro-driver, when software/firmware

is utilized in the system. See Figure 5. The equivalent circuit of this pin is a 5k resistor pulling up it to the VPS rail and an open drain FET pulling it down to the ground. The pull-up current can be increased by connecting an external pull-up resistor between VPS and LDGD pins, which is equivalent to paralleling the external resistor with the internal 5k pull-up resistor. However, the total pull-up resistor should be $\geq 1.5k @ V_{VPS}=5V$ or $\geq 1k @ V_{VPS}=3.3V$, otherwise, the internal open drain FET cannot provide the resistors with enough pull-down current to achieve a low enough potential level for a logic low indication. To calculate the total pull-up resistor, use the equation below:

$$R_{TOTAL} = (R_{INTERNAL} \times R_{EXTERNAL}) / (R_{INTERNAL} + R_{EXTERNAL})$$

where:

R_{TOTAL} is the total pull-up resistor,

$R_{INTERNAL}$ is the internal pull-up resistor,

$R_{EXTERNAL}$ is the external pull-up resistor.

The laser diode D2 is connected between LDA and LDC. It is worth mentioning that the power supply return terminal should be connected to the pin 11 PGND and the cathode of the laser diode should be connected to the pin 10 LDC. These 2 pins, 10 and 11, should not be connected together externally and they are connected together internally already by the driver.

Figure 5 shows a typical micro-processor-based application circuit.

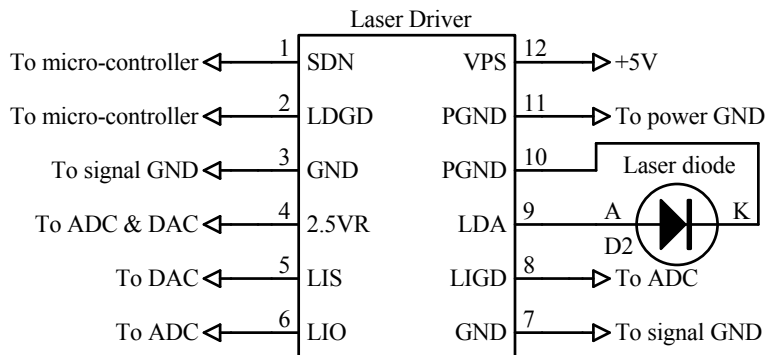


Figure 5. A Typical Micro-processor-based Application Schematic

Typical Characteristic

The curve of the V_{VPS} vs. V_{LDAMAX} is shown as below, when the V_{VPS} equals to 3.1V, 3.3V, 5V and 6V, the corresponding V_{LDAMAX} is 2.5V, 2.63V, 4.25V and 5.2V respectively.

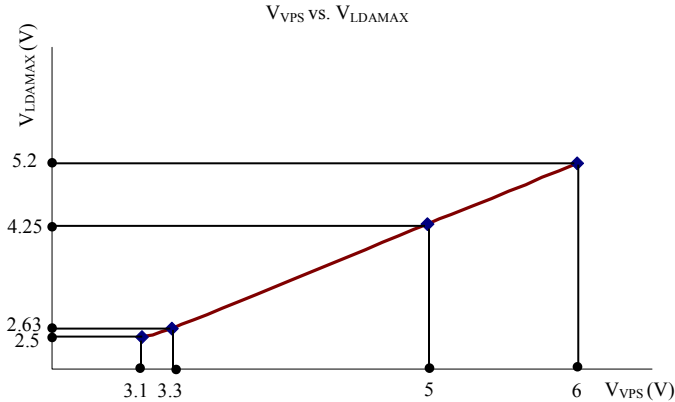


Figure 6. V_{VPS} vs. V_{LDAMAX}

Figure 7 shows the relationship between Pin VPS and LDA.

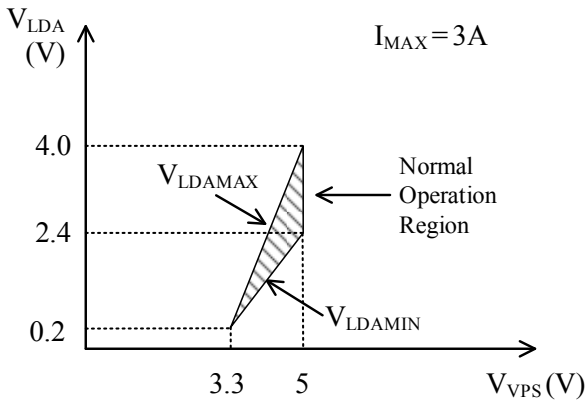


Figure 7. V_{VPS} vs. V_{LDA}

Turning the Driver On and Off

The driver can be turned on and off by setting the SDN pin high and low respectively. It is recommended to turn the driver on by this sequence:

To turn on: turn on the power by providing the power supply voltage to the driver on VPS pin, turn on the driver by releasing the SDN pin.

To turn off: turn off the driver by lowering the voltage of SDN pin, turn off the power by stopping the voltage supply on the VPS pin.

When not controlling by the SDN pin: leave it unconnected and turn on and off the driver by the power supply.

Adjusting the Output Current

The output current is set by adjusting W1, which sets input voltages of LIS, pin 5. See Figure 4.1. The output current will be:

$$I_{OUT} \text{ (A)} = 3.0 \text{ (A)} \times V_{LIS} \text{ (V)} / 2.5 \text{ (V)}.$$

LIS can be configured by using a DAC, to replace the W1 in Figure 4.1. Make sure that the DAC has output low noise, or, if no modulation is needed, an RC low pass filtered by be inserted between the DAC and the LIS pin. See Figure 5.

The LIO can still be used to monitor the output current when the LIS is adjusted. 0V to 2.5V indicates the laser current of from 0A to 3 A linearly.

Monitoring the Output Current

The output current of the driver can be monitored by measuring the voltage on the LIO pin. This feature is very useful for micro-driver based system where the ADC is available and monitoring the current in real time is required. This pin provides a very low noise voltage signal and is proportional to the output current:

$$V_{LIO} \text{ (V)} = 2.5 \text{ (V)} \times I_{OUT} \text{ (A)} / 3.0 \text{ (A)}.$$

For example, when the output signal is 2.5V, the output current is 3A.

LIO can be used to drive an ADC directly, and also be measured by a multi-meter.

Driver Power Consumption

The power consumption of the driver can be calculated by:

$$P_{DRIVER} = I_{IN} \times V_{VPS} - I_{OUT} \times V_{LDA},$$

where P_{DRIVER} is the power consumed by the driver itself; I_{OUT} is the output current;

I_{IN} is the power supply's input current;

V_{VPS} is the power supply voltage;

V_{LDA} is the voltage across the laser diode;

$$\eta = (I_{OUT} \times V_{LDA}) / (I_{IN} \times V_{VPS}).$$

When P_{DRIVER} of ATLS3A201D exceeds 2.5W, a heat sink is needed to keep the driver's temperature below certain level, preferably below 85°C. For most applications, the power consumption exceeds 2.5W when the driving is outputting 6A, thus, heat sinking mechanism is needed. The best way for arranging the heat sinking for the driver is as follows: transferring the heat by sandwiching a piece of gap filler material between the top metal surface of ATLS3A201D and the internal metal surface of the final product's case as shown in Figure 8 below.

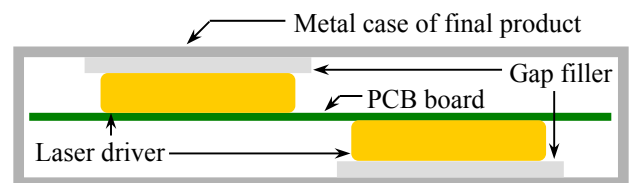


Figure 8. Transferring heat by the gap filler

The gap filler material needs to be mechanically elastic and

thermally conductive. One of such products is the T-flex 200 filler sheet made by Lairdtech, the available thickness is between 1mm to 4mm. More detail technical data about this material can be found here: www.lairdtech.com.

To minimize the power consumed by the driver, VPS can be set to such as a value that the maximum LDA voltage is enough to cover the maximum forward voltage of the laser diode. The maximum forward voltage of the laser diodes can be found from the laser diodes' datasheets.

Using a 3.3V power supply is enough for certain wavelength laser diodes, while shorter wavelength laser diodes may require 5V power supply. However, using a 3.3V power supply results in a much lower power consumption by the driver than using a 5V power supply.

First Time Power Up

Laser diode is a high value and vulnerable device. Faults in connections and damages done to the driver during soldering process may damage the laser diode permanently.

To protect the laser diode, it is highly recommend to use 3 to 4 regular diodes of $>6A$ to form a "dummy laser" and insert it in the place of the real laser diode, when powering up the driver for the first time. Use an oscilloscope to monitor the LDA voltage at times of powering up and enabling the shutdown pin, and powering down the laser driver and turning off the shutdown pin, and make sure that there is not over-shoot in

output voltage at the LDA pin. At the same time, use an ammeter in series with the dummy laser, to make sure that the output current is correct.

After thorough checking and making sure free of faults in the system, disconnect the dummy laser diode and connect the real laser diode in place.

Driving High Voltage Laser Diodes

Some laser diodes have high forward voltage, such as 7V, while the laser driver ATLS3A201D has a maximum output voltage of 4V. This section tells a way to drive such laser diodes by using this laser driver.

The schematic is show as in Figure 10. Where Power Supply 1 is the power supply for the laser driver, Power Supply 2 is for increasing the laser driver's maximum output voltage.

Please notice that the power on sequence has to be in this way: turn on Power Supply 1, turn on Power Supply 2, then turn on the laser driver by driving SDN (Shutdown) pin to logic high.

The sequence for turning off the laser circuit is: turn off the SDN pin by pulling it down to the logic low, turn off Power Supply 1, then, turn off power supply 2.

To make sure the circuit works ok: turn on the laser, measure LDA voltage, it should be between 1V to 3V, at room temperature, the ideal LDA voltage is around 2V.

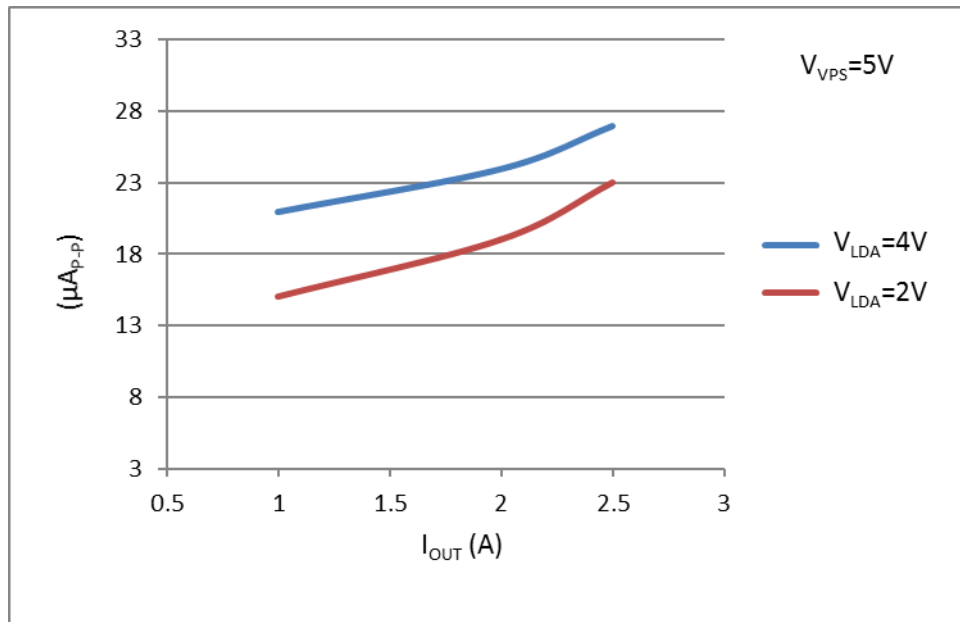


Figure 9. I_{OUT} vs. Output Current Noise@0.1Hz~10Hz

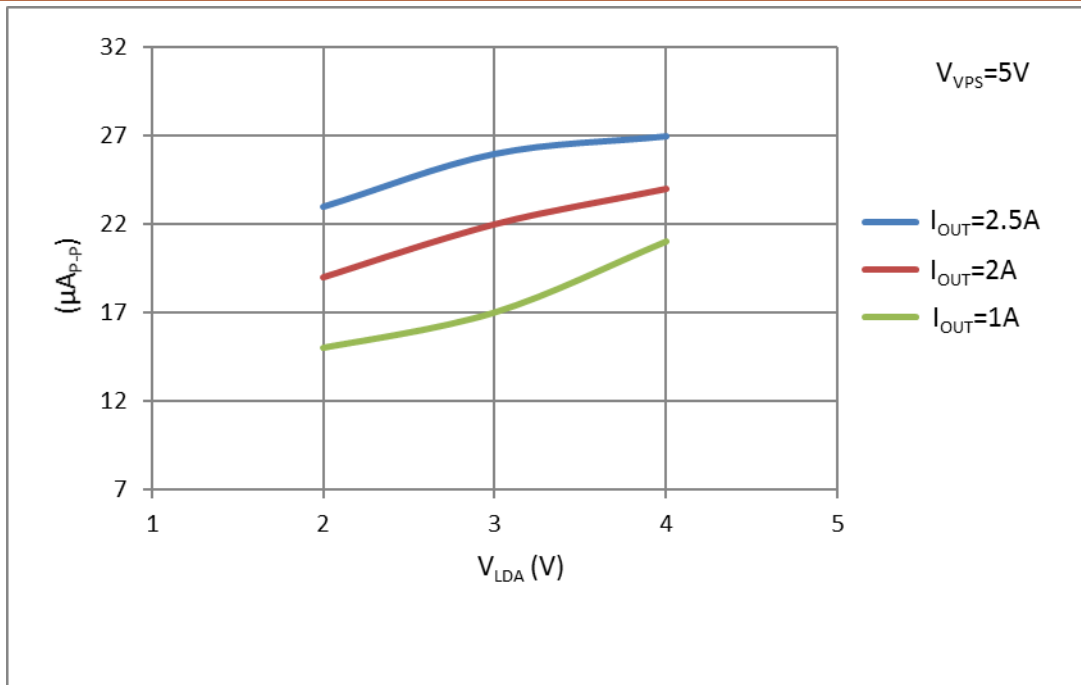


Figure 10. V_{LDA} vs. Output Current Noise@0.1Hz~10Hz

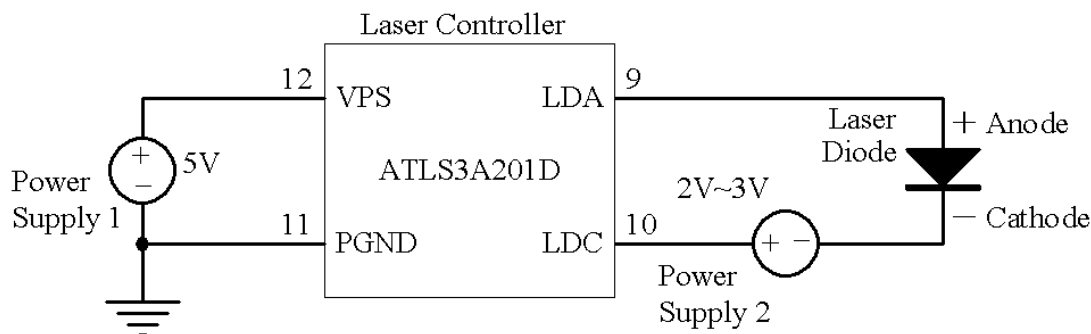


Figure 11. Driving High Voltage Laser Diodes

OUTLINE DIMENSIONS

The driver comes in only one package: through hole mount. It is often called DIP (Dual In Line Package) or D (short for DIP) package. And the part number is: ATLS3A201D. Dimensions of the DIP package driver are shown in Figure 12

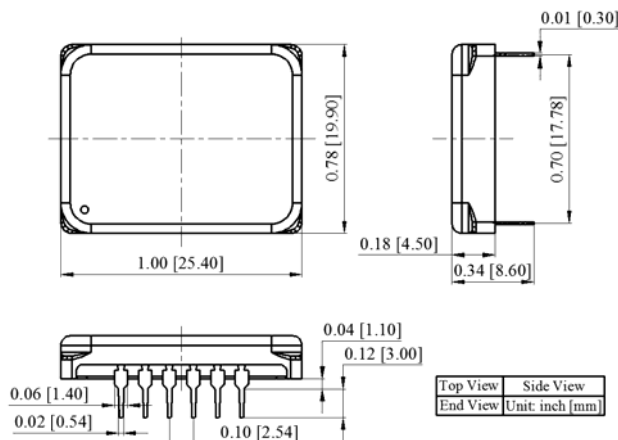


Figure 12. Dimensions of the DIP Package Driver

Figure 13 shows the foot-print which is seen from the end side of the PCB.

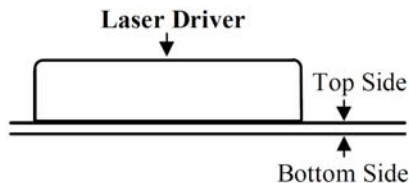


Figure 13. End View of the PCB Foot-print

“Tent” (i.e. cover the entire via by the solder mask layer) all the vias under the driver, otherwise, the vias can be shorted by the bottom plate of the driver which is internally connected the ground.

See Figure 14 and 15, it is recommended to use large copper fills for VPS, LDC, and the LDA pins, and other pins if possible, to decrease the thermal resistance between the module and the supporting PCB, to lower the module temperature.

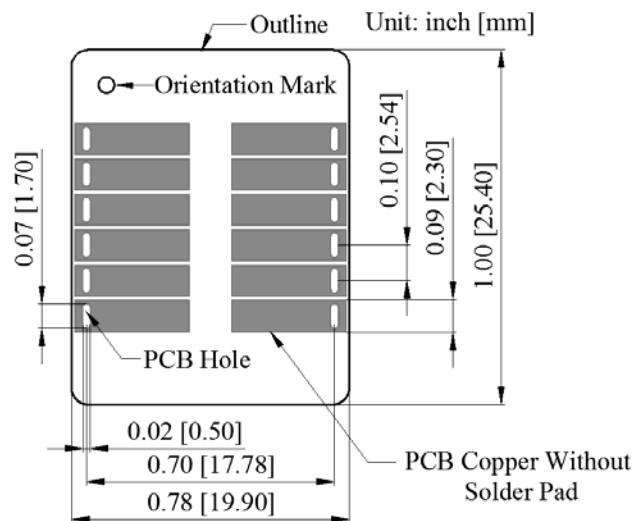


Figure 14. Top View of the Top Side PCB Foot-print

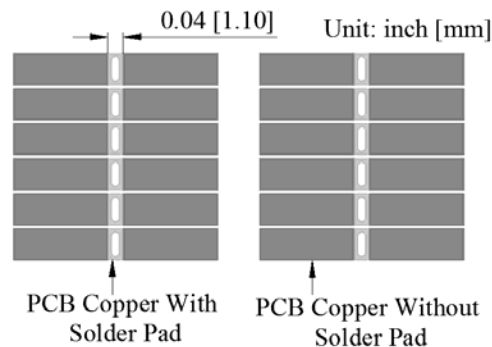


Figure 15. Top View of the Bottom Side PCB Foot-print

Figure 15 shows the foot-print which is seen from the bottom side of the PCB.

MOUNTING

It is highly recommended to lower solder iron temperature to 310°C and solder the driver manually, so that the internal contents of the driver would not be affected.

After the soldering, it is also safe to check the laser driver’s functionality by using the “dummy laser” before connecting a real laser diode as mentioned previously on page 5.

WARNING: This module can only be soldered manually on the board by a solder iron at < 310°C (590°F), it cannot go through a reflow oven process.

NOTE: The power supply may have overshoot, when happens, it may exceed the maximum allowed input voltage, 6V, of the controller and damage the controller permanently. To avoid this from happening, do the following:

1. Connect the controller solid well with the power supply before turning on the power.

2. Make sure that the power supply has sufficient output current. It is suggested that the power supply can supply 1.2 to 1.5 times the maximum current the controller requires.

3. When using a bench top power supply, set the current limit to >1.5 times higher than the maximum current the controller requires.

ORDERING INFORMATION

Table 3. Part Number

Part Number	Description
ATLS3A201D	3A constant current driver in DIP package
ATLS3A201D-PD	3A constant current driver with a pull-down resistor of 55k to the ground in SDN pin

PRICES

Table 4. Unit Price

Quantity	1 – 9 pcs	10 – 49 pcs	50 – 199 pcs	200-499 pcs	≥500 pcs
ATLS3A201D	\$77	\$73.8	\$69.5	\$65.3	\$61
ATLS3A201D-PD	\$77	\$73.8	\$69.5	\$65.3	\$61

NOTICE

- ATI warrants performance of its products for one year to the specifications applicable at the time of sale, except for those being damaged by excessive abuse. Products found not meeting the specifications within one year from the date of sale can be exchanged free of charge.
- ATI reserves the right to make changes to its products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.
- All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability. Testing and other quality control techniques are utilized to the extent ATI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.
- Customers are responsible for their applications using ATI components. In order to minimize risks associated with the customers' applications, adequate design and operating safeguards must be provided by the customers to minimize inherent or procedural hazards. ATI assumes no liability for applications assistance or customer product design.
- ATI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of ATI covering or relating to any combination, machine, or process in which such products or services might be or are used. ATI's publication of information regarding any third party's products or services does not constitute ATI's approval, warranty or endorsement thereof.
- IP (Intellectual Property) Ownership: ATI retains the ownership of full rights for special technologies and/or techniques embedded in its products, the designs for mechanics, optics, plus all modifications, improvements, and inventions made by ATI for its products and/or projects.