

Figure 1A. Physical Photo of AXHV24VP20KV1MABT

FEATURES

- High precision
- High efficiency
- High output voltage stability
- Adjustable Integrated Filament Supply
- Local and Remote Emission Control
- Voltage & Current Programming
- Overcurrent voltage protection
- Arc and Short circuit protection
- Safety Interlock
- OEM Customization Available

APPLICATIONS

AXHV24VP20KV1MABT is a high stability high voltage power supply, which is widely used in scientific research and other fields including: X-ray Tube, Thickness Gauge, Nondestructive Detection, X-ray Fluorescence, X-ray Fluoroscopy, Density Measurement, ROHS testing, Plating Measurement, Radiography, X-ray Imaging, PCB Inspection, Density Measurement, Process Control, X-ray Spectroscopy, Mineral Analysis, Life Science.

DESCRIPTION

AXHV24VP20KV1MABT is a high voltage power supply for X-ray tubes with high stability. It is designed to drive



Figure 1B. Physical Photo of AXHV24VP20KV1MABT

a ground filament X-ray tube with an integrated X-ray tube filament power supply. The ground filament power supply voltage is adjustable from 0 to 5.5VDC and the current is adjustable from 0 to 3.5A.

SAFETY PRECAUTIONS

High voltage power supply must be connected to ground reliably.

Do not touch the high voltage wire, unless the high voltage power supply is powered off, and the load and internal capacitors are fully discharged.

When the high voltage power supply is powered off, wait for another 5 minutes for fully discharging all the capacitors inside the power supply.

Do not operate the power supply in humid environment, and do not connect the operator to ground.

The internal protection circuit is provided in the high voltage power supply, but the high voltage short circuit shall be avoided.

Make sure the circuit is insulated perfectly, especially between the high voltage output and the surroundings so as to avoid electronic shock.



SPECIFICATIONS

Table 1. Characteristics.

T_A = 25°C, unless otherwise noted

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit/Note |
|--|--------------------|---|--|--------|-------|-------------------|
| Input Voltage | V _{VPS} | | 23 | 24 | 25 | V _{DC} |
| Input Current | I _{INFLD} | I _{OUT} = 1mA | | | 3 | A |
| Output Voltage | V _{OUT} | I _{OUT} = 0 ~ 1mA | 0 | | 20000 | V |
| Output Current | I _{OUT} | Full load | 0 | | 1 | mA |
| Ripple | | Bandwidth = 1MHz R _{LOAD} = 20 MΩ | | <0.1 | | %V _{P-P} |
| Load | | | 20 | | ∞ | MΩ |
| Output Control Mode | | | Local control 10k potentiometer or remote control 0 ~ +10V | | | |
| Monitor Voltage Out Impedance | Z _{VMON} | | | 10 | | kΩ |
| Monitor Voltage | V _{MON} | V _{OUT} = 0 ~ 20kV | 0 | | 10 | V |
| Monitor Current Out Impedance | Z _{VMON} | | | 10 | | kΩ |
| Monitor Current | V _{MON} | I _{OUT} = 0 ~ 1mA | 0 | | 10 | V |
| Output Voltage Display Accuracy | | | | ±1 | | % |
| Output Current Display Accuracy | | | | ±1 | | % |
| Remote Control Voltage | | V _{CTRL} = 0 ~ 10V Z _{IN} = 10MΩ | 0 | | 20 | kV |
| Local Control Voltage | | R _P = 0 ~ 10kΩ | 0 | | 20 | kV |
| Remote Control Current | | V _{CTRL} = 0 ~ 10V Z _{IN} = 10MΩ | 0 | | 1 | mA |
| Local Control Current | | R _P = 0 ~ 10kΩ | 0 | | 1 | mA |
| Voltage Relative Load Adjustment Ratio | | R _{LOAD} = 0 ~ 20MΩ | | 0.01 | | % |
| Voltage Relative Input Adjustment Rate | | V _{VPS} = 23V ~ 25V | | <0.01 | | % |
| Current Relative Load Adjustment Ratio | | R _{LOAD} = 0 ~ 20MΩ | | 0.01 | | % |
| Current Relative Input Adjustment Rate | | V _{VPS} = 23V ~ 25V | | <0.01 | | % |
| Filament Voltage | | | 0 | | 5.5 | V |
| Filament Current | | | 0 | | 3.5 | A |
| Instantaneous Short Circuit Current | I _{SC} | | | <100 | | mA |
| Full Load Efficiency | η | | | ≥70 | | % |
| Temperature Coefficient | TCV _O | 0 ~ 50°C | | ≤25 | | ppm/°C |
| Time Drift | Short Time Drift | After 30 minute warm up | | <0.01 | | %/h |
| | Long Time Drift | | | <0.02 | | %/8h |
| Output Voltage Temperature Stability | | 0 ~ 50°C | | <±0.01 | | % |



| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit/Note |
|-----------------------------|------------------|--|----------------|-------|------|-----------|
| Operating Temperature Range | T _{opr} | | 0 | | 50 | °C |
| Storage Temperature Range | T _{stg} | | -40 | | 85 | °C |
| Cooling | | 0~60W: Natural cooling; 60~100W: Air cooling | | | | |
| Humidity | | 20%-85% relative humidity non-condensing | | | | |
| External Dimensions | | | 150x115x65 | | mm | |
| | | | 5.91x4.53x2.56 | | inch | |
| Weight | | | | 1.55 | | kg |
| | | | | 3.42 | | lbs |
| | | | | 54.67 | | Oz |

PANEL INSTRUCTIONS

Front Panel

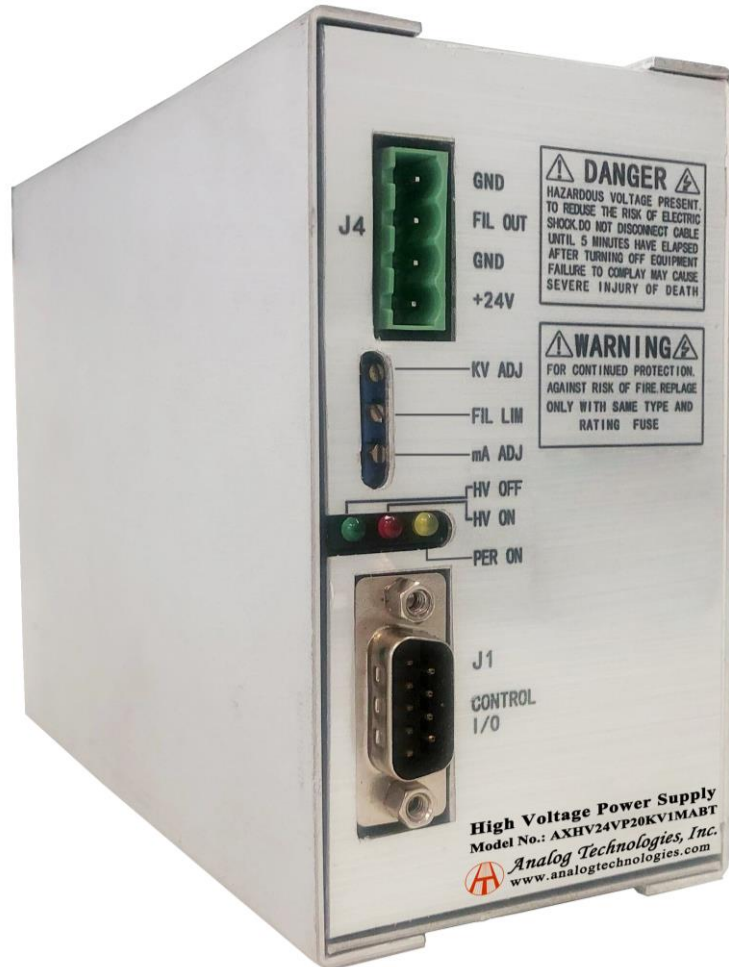


Figure 2. Front Panel



Table 2. J4 Simulate Port

| No. | Name | Description |
|-----|---------|---|
| 1 | +24V | +24Vdc±1V, Maximum current 5A.. |
| 2 | GND | Power Ground. |
| 3 | FIL OUT | Filament voltage is controlled by adjusting the FIL LIM potentiometer to the FIL OUT output, +5.5V@3.5A, maximum. |
| 4 | GND | Filament Ground. |



Figure 3. Local Potentiometer Control

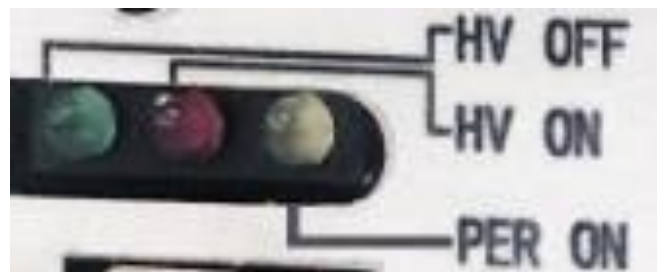


Figure 4. Indicator Light

Table 3. Local Control

| Name | Description |
|---------|--|
| KV ADJ | Local potentiometer controls voltage output. |
| FIL LIM | Filament controls the output. |
| mA ADJ | Local potentiometer controls current output. |

Table 4. Indicator Light

| Name | Description |
|--------|---------------------------|
| HV OFF | Green light ON, HV OFF. |
| HV ON | Red light ON, HV ON. |
| PER ON | Filament power indicator. |

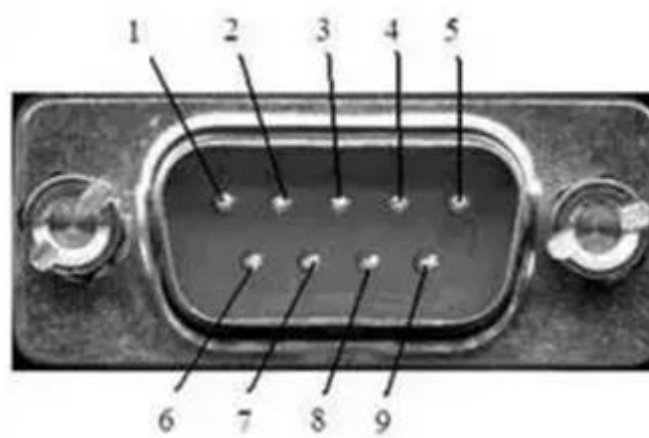


Figure 5. 9 Pin Type D Connector



Table 5. 9 Pin Type D Connector

| No. | Name | Description |
|-----|------------------------------|--|
| 1 | Reference Voltage | +10Vdc reference voltage. |
| 2 | Voltage Monitor | 0 to 10V = 0 to 100% rated output, $Z_{OUT} = 10k\Omega$. |
| 3 | Remote Voltage Program In | 0 to 10V = 0 to 100% rated output, $Z_{IN} = 10M\Omega$. |
| 4 | Local Voltage Control Output | Connect 3 and 4, control voltage from 0 to 10V = 0 to 100% rated output voltage by KV ADJ potentiometer. |
| 5 | Current Monitor | 0 to 10V = 0 to 100% rated output, $Z_{OUT} = 10k\Omega$. |
| 6 | Remote Current Program In | 0 to 10V = 0 to 100% rated output, $Z_{IN} = 10M\Omega$. |
| 7 | Local Current Control Output | Connect 6 and 7, control voltage from 0 to 10V = 0 to 100% rated output voltage by mA ADJ potentiometer. |
| 8 | External Interlock | Connected to ground, HV ON. |
| 9 | GND | Interlocking returns to ground. |

Back Panel



Figure 6. Back Panel



TESTING DATA

High voltage power supply testing data (Test condition: the load is 20MΩ).

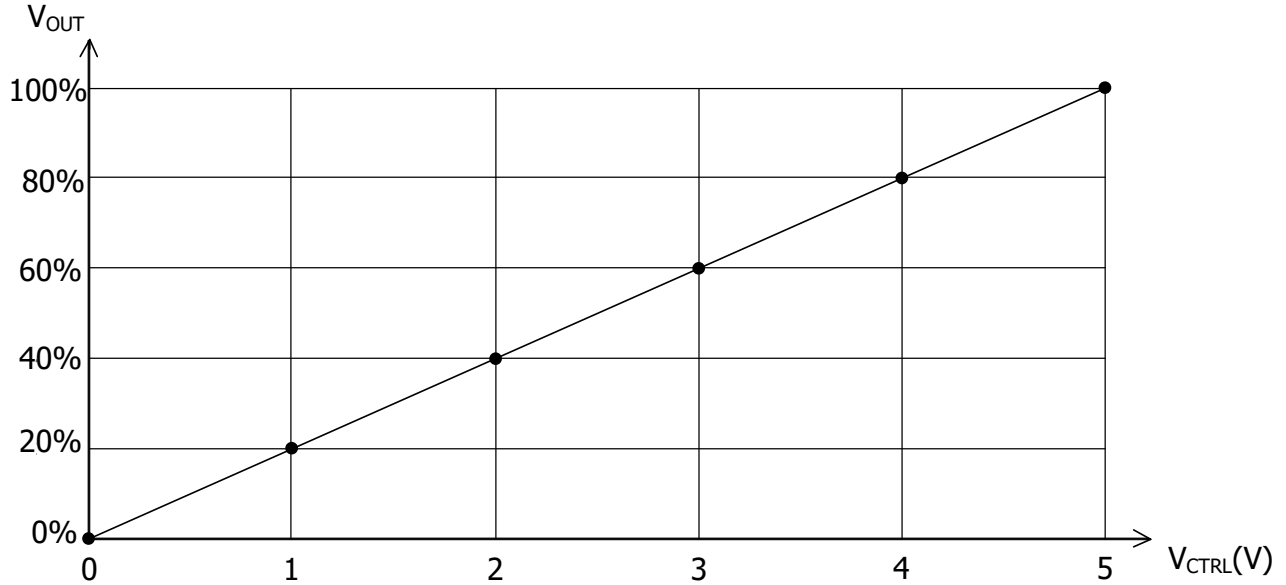


Figure 7. V_{CTRL} vs. V_{OUT}

NAMING INSTRUCTIONS


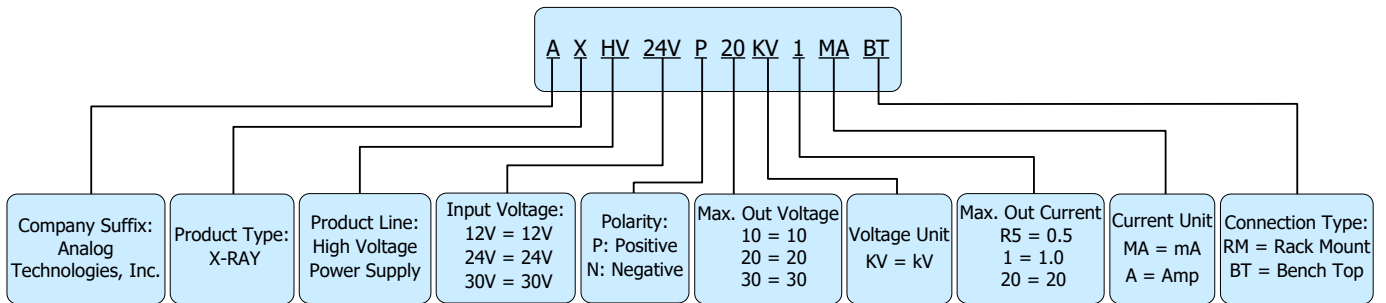


Figure 8. Naming Rules of AXHV24VP20KV1MABT



DIMENSIONS

Dimension of AXHV24VP20KV1MABT.

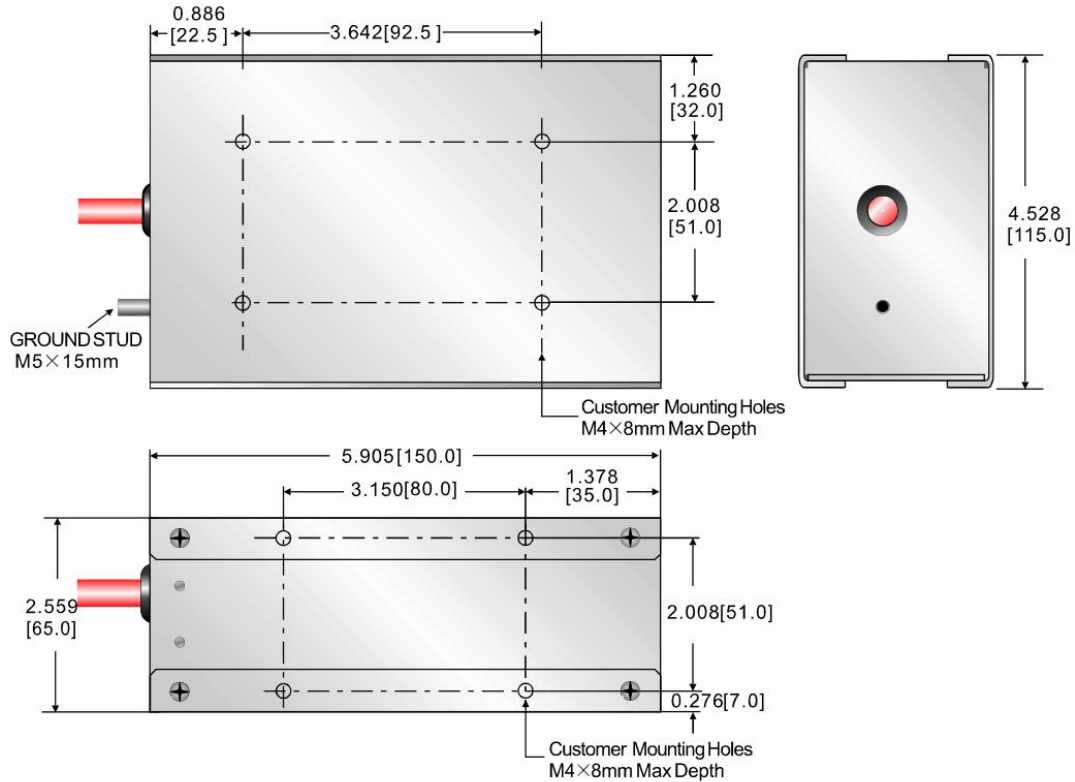

Unit: inch / mm

Figure 9. Dimensions for AXHV24VP20KV1MABT

ORDERING INFORMATION

| Part Number | Buy Now |
|-------------------|---------|
| AXHV24VP20KV1MABT | * * |

*: both and are our online store icons. Our products can be ordered from either one of them with the same pricing and delivery time.

NOTICE

- It is important to carefully read and follow the warnings, cautions, and product-specific notes provided with electronic components. These instructions are designed to ensure the safe and proper use of the component and to prevent damage to the component or surrounding equipment. Failure to follow these instructions could result in malfunction or failure of the component, damage to surrounding equipment, or even injury or harm to individuals. Always take the necessary precautions and seek professional assistance if unsure about proper use or handling of electronic components.



2. Please note that the products and specifications described in this publication are subject to change without prior notice as we continuously improve our products. Therefore, we recommend checking the product descriptions and specifications before placing an order to ensure that they are still applicable. We also reserve the right to discontinue the production and delivery of certain products, which means that not all products named in this publication may always be available.
3. This means that while ATI may provide information about the typical requirements and applications of their products, they cannot guarantee that their products will be suitable for all customer applications. It is the responsibility of the customer to evaluate whether an ATI product with the specified properties is appropriate for their particular application.
4. ATI warrants its products to perform according to specifications for one year from the date of sale, except when damaged due to excessive abuse. If a product fails to meet specifications within one year of the sale, it can be exchanged free of charge.
5. ATI reserves the right to make changes or discontinue products or services without notice. Customers are advised to obtain the latest information before placing orders.
6. All products are sold subject to terms and conditions of sale, including those pertaining to warranty, patent infringement, and limitation of liability. Customers are responsible for their applications using ATI products, and ATI assumes no liability for applications assistance or customer product design.
7. ATI does not grant any license, either express or implied, under any patent right, copyright, mask work right, or other intellectual property right of ATI.
8. ATI's publication of information regarding third-party products or services does not constitute approval, warranty, or endorsement.
9. ATI retains ownership of all rights for special technologies, techniques, and designs for its products and projects, as well as any modifications, improvements, and inventions made by ATI.
10. Please note that despite operating the passive electronic components as specified, malfunctions or failures before the end of their usual service life may still occur in individual cases due to the current state of the art. Therefore, in customer applications that require a high level of operational safety, especially those in which the malfunction or failure of a passive electronic component could pose a threat to human life or health (such as in accident prevention or life-saving systems), it is essential to ensure through suitable design of the customer application or other measures taken by the customer (such as the installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of a passive electronic component malfunction or failure.