

Figure 1. The physical photo of ATH10KHN12

FEATURES

- Glass Encapsulated for Long Term Stability & Reliability
- High Resistance Accuracy: 1%
- Maximum Temp. Range: -40°C to 270°C
- Packaged in Extra Threaded Hex Nut
- 100 % Lead (Pb)-free and RoHS Compliant

APPLICATION

- Temperature Sensing
- Temperature Detection
- Transformers
- Electric Motors
- Air Sensors

DESCRIPTIONS

The ATH10KHN12 is a thermistor assembly with threaded hex nut. The ATH10KHN12 has bear leads coated with copper. ATH10KHN12 thermistor assembly presents long term stability, high reliability and wide temperature range, compact size and short response time.

The ATH10KHN12 thermistor assembly can be used for temperature sensing and detection, transformers, and air sensors, etc..

SPECIFICATIONS

| Parameters                  | Value                                    |
|-----------------------------|--|
| Nominal Resistance @ 25°C   | 10K ± 1%                                 |
| B Value @ 25°C /50°C        | 3950K ± 1%                               |
| B Value @ 25°C /85°C        | 3990K ± 1%                               |
| R@25°C / R@50°C             | 2.771                                    |
| R@25°C / R@85°C             | 9.271                                    |
| Threaded Hex Nut Length     | 6mm+12mm                                 |
| Threaded Hex Nut Inner Dia. | 4mm                                      |
| Lead Dia.                   | 0.2mm                                    |
| Lead Length                 | 70 ± 1mm                                 |
| Insulation Resistance       | 50MΩ                                     |
| Time Constant               | 37.8s (in still air)<br>1.22s (in water) |

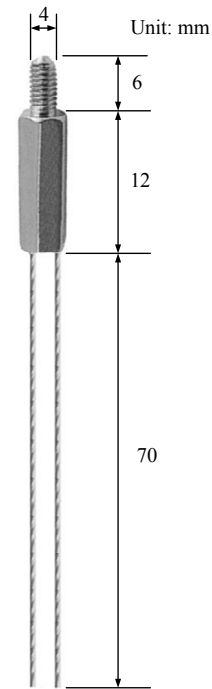


Figure 2. The Front and Side Views of ATH10KHN12



#### CAUTIONS

1. Do not apply a large DC voltage across the thermistor in the temperature sensing circuit. The thermistor self-heating temperature is about 1°C/mW. By injecting a 10µA current into the thermistor, it consumes 1mW and the self-heating temperature is about 1°C if the thermistor is placed in still air. Therefore, the sensing current needs to be much lower than 10µA when the thermistor is placed in the air for high accuracy applications. Injecting short current pulses into the thermistor is one of the ways to reduce the average current level on the thermistor in order to minimize the self-heating effect.
2. Handle the thermistor with care, do not use metal tools to hold the thermistor body with excessive force, otherwise, the glass body may crack, affecting its accuracy and stability.

#### Thermistor Resistance

##### Beta Value (β)

A simple approximation for the relationship between the resistance and temperature for ATH10KHN12 is to use an exponential approximation. This approximation is based on simple curve fitting to experimental data and uses two points on a curve to determine the value of β. The equation relating resistance to temperature using β is:

$$R = Ae^{\frac{\beta}{T}}$$

Where:

- R = thermistor resistance at temp T,
- A = constant of equation,
- β = beta, the material constant,
- T = thermistor temperature in °K(Kelvin),

To calculate β for any given temperature range, the following formula applies:

$$\beta = \ln(R_{T1} / R_{T2}) / (1/T1 - 1/T2)$$

Where β is measured in K, R<sub>T1</sub> is the resistance at T1, while R<sub>T2</sub> is the resistance at T2.

β can be used to compare the relative steepness of ATH10KHN12 curves. However, the value of β will vary depending on the temperatures used for calculating the value. For example, to calculate β for the temperature range of 25°C to 50°C:

$$\begin{aligned} T1 &= (25 + 273.15)^\circ\text{K} = 298.15^\circ\text{K}, \\ T2 &= (50 + 273.15)^\circ\text{K} = 323.15^\circ\text{K}, \\ R_{T1} &= 10\text{k}\Omega, \\ R_{T2} &= 3.6085\text{k}\Omega; \end{aligned}$$

This value of β would be referenced as β<sub>25°C/50°C</sub>, and calculated as:

$$\beta_{25^\circ\text{C}/50^\circ\text{C}} = \ln(10/3.6085) / (1/298.15 - 1/323.15) = 3950\text{K};$$

By using the same formula, β<sub>25°C/85°C</sub>, will be:

$$\beta_{25^\circ\text{C}/85^\circ\text{C}} = \ln(10/1.0786) / (1/298.15 - 1/358.15) = 3990\text{K}.$$

When using the β value to compare 2 thermistors, make sure that the β values are calculated based on the same 2 temperature points.

##### Temperature Coefficient of Resistance (α)

Another way to characterize the R-T curve of the ATH10KHN12 is to use the slope of the resistance versus temperature (R/T) curve at one temperature. By definition, the resistance slope vs. temperature is given by:

$$\alpha = (1/R) \times (dR/dT);$$

Where T is the temperature in °C or °K, R is the resistance at temperature T.

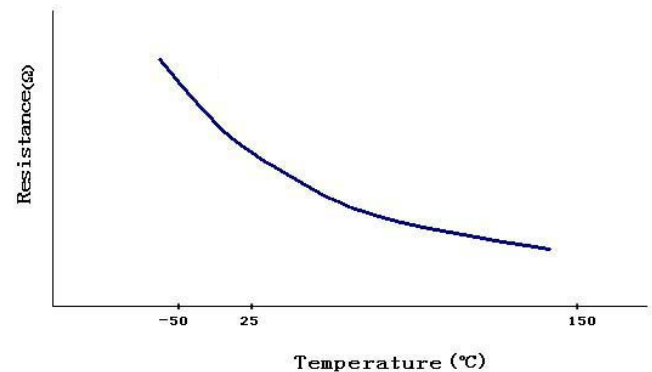


Figure 3. Resistance vs. Temperature for ATH10KHN12

As shown in Figure 3, the steepest position of the ATH10KHN12 curve is at colder temperatures.

The temperature coefficient is one method that can be used for comparing the relative steepness of the curves. It is highly recommended to compare the temperature coefficient at the same temperature because α varies widely over the operating temperature range.

##### Resistance Ratio (Slope)

The resistance ratio, or slope, for thermistors is defined as the ratio of the resistance at one temperature to the resistance at a higher temperature. As with resistance ratios, this method will vary depending on the temperatures used for calculating the value. This method can also be used to compare the relative steepness of two curves. There is no industry standard for the two temperatures that are used to calculate the ratio, we can select two common temperatures from the table below, for example, 25°C and 50°C, then the result of this calculation: R@25°C / R@50°C, will be:

$$R@25^\circ\text{C} / R@50^\circ\text{C} = 10/3.6085 = 2.771;$$

And this calculation: R@25°C/R@85°C, will be:

$$R@25^\circ\text{C} / R@85^\circ\text{C} = 10/1.0786 = 9.271.$$



Steinhart-Hart Thermistor Equation

The Steinhart-Hart Equation is an empirically derived polynomial formula which does best in describing the relationship between the resistance and the temperature of ATH10KHN12, which is much more accurate than β method. To solve for temperature when resistance is known, yields the following equation:

1/T = a + b(ln R) + C(ln R)³;

Where:

- T = temperature in °K (Kelvin),
a, b and c are equation constants,
R = resistance in Ω at temp T;

To solve for resistance when the temperature is known, the form of the equation is:

R = e^([(-x/2 + (x^2/4 + psi^3/27)^1/2)^1/3 + (-x/2 - (x^2/4 + psi^3/27)^1/2)^1/3];

Where:

x = (a - 1/T) / c, psi = b / c.

The a, b and c constants can be calculated for either a thermistor material or for individual values of the thermistors within a material type. To solve for the constants, three sets of data must be used. Normally, for a temperature range, the low end, middle end and high end values are used to calculate the constants, resulting in the best fit for the equation over the range. Using the Steinhart-Hart equation allows for accuracy as good as ±0.001°C over a 100°C temperature span.



Resistance Temperature Characteristics

| Temp | Resistance | Temp | Resistance | Temp | Resistance | Temp | Resistance | Temp | Resistance |
|------|------------|------|------------|------|------------|------|------------|------|------------|
| °C   | kΩ         | °C   | kΩ         | °C   | kΩ         | °C   | kΩ         | °C   | kΩ         |
| -40  | 342.55     | 7    | 23.041     | 54   | 3.1061     | 101  | 0.6639     | 148  | 0.1957     |
| -39  | 320.26     | 8    | 21.935     | 55   | 2.9940     | 102  | 0.6463     | 149  | 0.1912     |
| -38  | 299.57     | 9    | 20.908     | 56   | 2.8858     | 103  | 0.6280     | 150  | 0.1869     |
| -37  | 280.36     | 10   | 19.921     | 57   | 2.7816     | 104  | 0.6102     | 151  | 0.1786     |
| -36  | 262.51     | 11   | 18.984     | 58   | 2.6834     | 105  | 0.5932     | 152  | 0.1745     |
| -35  | 245.92     | 12   | 18.100     | 59   | 2.5871     | 106  | 0.5766     | 153  | 0.1706     |
| -34  | 230.49     | 13   | 17.264     | 60   | 2.4969     | 107  | 0.5605     | 154  | 0.1667     |
| -33  | 216.13     | 14   | 16.471     | 61   | 2.4086     | 108  | 0.5449     | 155  | 0.1629     |
| -32  | 202.77     | 15   | 15.717     | 62   | 2.3244     | 109  | 0.5229     | 156  | 0.1593     |
| -31  | 190.31     | 16   | 15.004     | 63   | 2.2441     | 110  | 0.5153     | 157  | 0.1557     |
| -30  | 178.71     | 17   | 14.327     | 64   | 2.1658     | 111  | 0.5013     | 158  | 0.1523     |
| -29  | 167.89     | 18   | 13.683     | 65   | 2.0915     | 112  | 0.4877     | 159  | 0.1489     |
| -28  | 157.80     | 19   | 13.073     | 66   | 2.0202     | 113  | 0.4745     | 160  | 0.1456     |
| -27  | 148.37     | 20   | 12.494     | 67   | 1.9515     | 114  | 0.4617     | 161  | 0.1424     |
| -26  | 139.58     | 21   | 11.943     | 68   | 1.8854     | 115  | 0.4493     | 162  | 0.1393     |
| -25  | 131.36     | 22   | 11.419     | 69   | 1.8219     | 116  | 0.4371     | 163  | 0.1363     |
| -24  | 123.68     | 23   | 10.923     | 70   | 1.7610     | 117  | 0.4256     | 164  | 0.1333     |
| -23  | 116.49     | 24   | 10.449     | 71   | 1.7022     | 118  | 0.4141     | 165  | 0.1304     |
| -22  | 109.78     | 25   | 10.000     | 72   | 1.6457     | 119  | 0.4032     | 166  | 0.1276     |
| -21  | 103.49     | 26   | 9.5730     | 73   | 1.5916     | 120  | 0.3927     | 167  | 0.1249     |
| -20  | 97.597     | 27   | 9.1658     | 74   | 1.5393     | 121  | 0.3823     | 168  | 0.1222     |
| -19  | 92.091     | 28   | 8.7783     | 75   | 1.4891     | 122  | 0.3724     | 169  | 0.1196     |
| -18  | 86.912     | 29   | 8.4085     | 76   | 1.4406     | 123  | 0.3628     | 170  | 0.1171     |
| -17  | 82.063     | 30   | 8.0586     | 77   | 1.3941     | 124  | 0.3535     | 171  | 0.1146     |
| -16  | 77.525     | 31   | 7.7224     | 78   | 1.3494     | 125  | 0.3445     | 172  | 0.1122     |
| -15  | 73.259     | 32   | 7.4041     | 79   | 1.3063     | 126  | 0.3356     | 173  | 0.1099     |
| -14  | 69.245     | 33   | 7.0995     | 80   | 1.2648     | 127  | 0.3271     | 174  | 0.1076     |
| -13  | 65.485     | 34   | 6.8109     | 81   | 1.2246     | 128  | 0.3189     | 175  | 0.1054     |
| -12  | 61.958     | 35   | 6.5341     | 82   | 1.1861     | 129  | 0.3109     | 176  | 0.1032     |
| -11  | 58.626     | 36   | 6.2711     | 83   | 1.1488     | 130  | 0.3031     | 177  | 0.1011     |
| -10  | 55.508     | 37   | 6.0180     | 84   | 1.1131     | 131  | 0.2955     | 178  | 0.0990     |
| -9   | 52.566     | 38   | 5.7788     | 85   | 1.0786     | 132  | 0.2882     | 179  | 0.0970     |
| -8   | 49.799     | 39   | 5.5496     | 86   | 1.0453     | 133  | 0.2811     | 180  | 0.0950     |
| -7   | 47.208     | 40   | 5.3302     | 87   | 1.0132     | 134  | 0.2742     | 181  | 0.0931     |
| -6   | 44.753     | 41   | 5.1207     | 88   | 0.9823     | 135  | 0.2675     | 182  | 0.0912     |
| -5   | 42.454     | 42   | 4.9211     | 89   | 0.9524     | 136  | 0.2609     | 183  | 0.0894     |
| -4   | 40.273     | 43   | 4.7315     | 90   | 0.9236     | 137  | 0.2546     | 184  | 0.0876     |
| -3   | 38.228     | 44   | 4.5478     | 91   | 0.8957     | 138  | 0.2484     | 185  | 0.0859     |
| -2   | 36.281     | 45   | 4.3740     | 92   | 0.8690     | 139  | 0.2425     | 186  | 0.0842     |
| -1   | 34.407     | 46   | 4.2082     | 93   | 0.8431     | 140  | 0.2367     | 187  | 0.0825     |
| 0    | 32.738     | 47   | 4.0484     | 94   | 0.8181     | 141  | 0.2311     | 188  | 0.0809     |
| 1    | 31.104     | 48   | 3.8944     | 95   | 0.7938     | 142  | 0.2256     | 189  | 0.0793     |
| 2    | 29.568     | 49   | 3.7485     | 96   | 0.7705     | 143  | 0.2203     | 190  | 0.0778     |
| 3    | 28.109     | 50   | 3.6085     | 97   | 0.7481     | 144  | 0.2151     | 191  | 0.0763     |
| 4    | 26.729     | 51   | 3.4764     | 98   | 0.7262     | 145  | 0.2100     | 192  | 0.0748     |
| 5    | 25.428     | 52   | 3.3464     | 99   | 0.7051     | 146  | 0.2052     | 193  | 0.0733     |
| 6    | 24.205     | 53   | 3.2243     | 100  | 0.6825     | 147  | 0.2004     | 194  | 0.0719     |



| Temp | Resistance | Temp | Resistance | Temp | Resistance | Temp | Resistance | Temp | Resistance |
|------|------------|------|------------|------|------------|------|------------|------|------------|
| °C   | kΩ         | °C   | kΩ         | °C   | kΩ         | °C   | kΩ         | °C   | kΩ         |
| 195  | 0.0706     | 211  | 0.0524     | 226  | 0.0402     | 241  | 0.0314     | 256  | 0.0248     |
| 196  | 0.0692     | 212  | 0.0514     | 227  | 0.0396     | 242  | 0.0309     | 257  | 0.0244     |
| 197  | 0.0679     | 213  | 0.0505     | 228  | 0.0389     | 243  | 0.0304     | 258  | 0.0241     |
| 198  | 0.0666     | 214  | 0.0496     | 229  | 0.0382     | 244  | 0.0299     | 259  | 0.0237     |
| 199  | 0.0654     | 215  | 0.0487     | 230  | 0.0376     | 245  | 0.0294     | 260  | 0.0234     |
| 200  | 0.0641     | 216  | 0.0479     | 231  | 0.0370     | 246  | 0.0290     | 261  | 0.0230     |
| 201  | 0.0630     | 217  | 0.0470     | 232  | 0.0364     | 247  | 0.0285     | 262  | 0.0227     |
| 202  | 0.0618     | 218  | 0.0462     | 233  | 0.0358     | 248  | 0.0280     | 263  | 0.0223     |
| 203  | 0.0606     | 219  | 0.0454     | 234  | 0.0352     | 249  | 0.0276     | 264  | 0.0220     |
| 204  | 0.0595     | 220  | 0.0446     | 235  | 0.0346     | 250  | 0.0272     | 265  | 0.0217     |
| 205  | 0.0584     | 221  | 0.0439     | 236  | 0.0340     | 251  | 0.0268     | 266  | 0.0214     |
| 206  | 0.0574     | 222  | 0.0431     | 237  | 0.0335     | 252  | 0.0264     | 267  | 0.0210     |
| 207  | 0.0563     | 223  | 0.0424     | 238  | 0.0329     | 253  | 0.0260     | 268  | 0.0207     |
| 208  | 0.0553     | 224  | 0.0416     | 239  | 0.0324     | 254  | 0.0256     | 269  | 0.0204     |
| 209  | 0.0543     | 225  | 0.0409     | 240  | 0.0319     | 255  | 0.0252     | 270  | 0.0201     |
| 210  | 0.0533     |      |            |      |            |      |            |      |            |



ORDERING INFORMATIONS

| Quantity (pcs) | 1 – 9 | 10 – 49 | 50 – 199 | 200 – 499 | ≥500  |
|----------------|-------|---------|----------|-----------|-------|
| ATH10KHN12     | \$2.5 | \$2.2   | \$1.9    | \$1.6     | \$1.3 |

NOTICE

- ATI reserves the right to make changes to its products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.
- All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability. Testing and other quality control techniques are utilized to the extent ATI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.
- Customers are responsible for their applications using ATI components. In order to minimize risks associated with the customers' applications, adequate design and operating safeguards must be provided by the customers to minimize inherent or procedural hazards. ATI assumes no liability for applications assistance or customer product design.
- ATI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of ATI covering or relating to any combination, machine, or process in which such products or services might be or are used. ATI's publication of information regarding any third party's products or services does not constitute ATI's approval, warranty or endorsement thereof.
- IP (Intellectual Property) Ownership: ATI retains the ownership of full rights for special technologies and/or techniques embedded in its products, the designs for mechanics, optics, plus all modifications, improvements, and inventions made by ATI for its products and/or projects.