

Figure 1.1. The physical photo of ATSC10KF1-E5

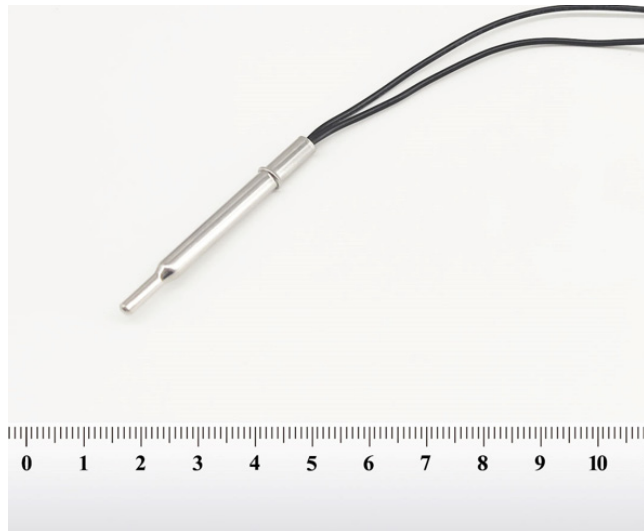


Figure 1.2. The physical photo of ATSC10KF1-E5

MAIN FEATURES

- Glass Encapsulated for Long Term Stability & Reliability
- High Resistance Accuracy: 1%
- Maximum Temp. Range: -40°C to 200°C
- Packaged in Extra Small Metal Shell
- 100 % Lead (Pb)-free and RoHS Compliant

APPLICATION AREAS

- Temperature Sensing
- Temperature Detection
- Transformers
- Electric Motors
- Air Sensors

DESCRIPTIONS

The ATSC10KF1-E5 thermistor assembly is housed by a stainless cap. The thermistor inside has glass encapsulation to

ensure long time operation, wide temperature range, and no parameter drift of either short time or long term. Both the cap and the ring are made of metal, making them long time lasting even under harsh environment, such as acid, moisture, etc. The output terminals use a pair of heavy duty PVC insulated wires of 26 AWG. The ends are terminated by a standard 2 pin plug, which can be customized for other types of connectors according to customers need. The length of the wires can also be specified.

SPECIFICATIONS

| Parameters | Value |
|-----------------------------------------------------|------------------------------------------|
| Nominal Resistance @ 25°C | $10\text{K} \pm 1\%$ |
| B Value @ $25^{\circ}\text{C} / 50^{\circ}\text{C}$ | $3950\text{K} \pm 1\%$ |
| B Value @ $25^{\circ}\text{C} / 85^{\circ}\text{C}$ | $3990\text{K} \pm 1\%$ |
| $R@25^{\circ}\text{C} / R@50^{\circ}\text{C}$ | 2.771 |
| $R@25^{\circ}\text{C} / R@85^{\circ}\text{C}$ | 9.271 |
| Metal Head Length | $43 \pm 0.1\text{mm}$ |
| Metal Head Width | $2.5 \pm 0.1\text{mm}$ |
| Lead Diameter | 1.5mm(26AWG) |
| Lead Length | 150mm(can be customized) |
| Insulation Resistance | $50\text{M}\Omega$ |
| Time Constant | 37.8s (in still air) 1.13s (in water) |

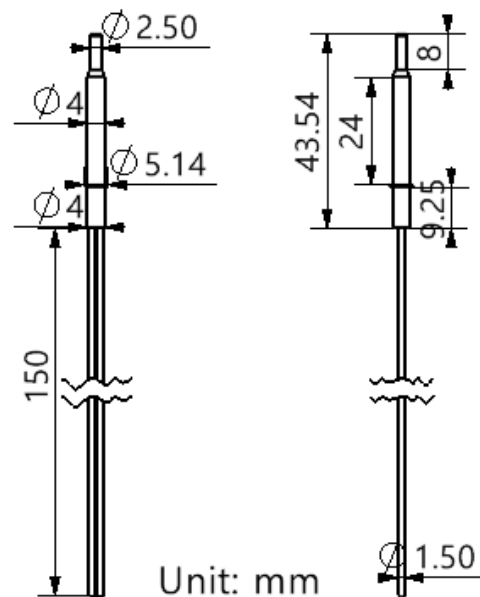


Figure 2. The Front and Side Views of ATSC10KF1-E5



Resistance Temperature Characteristics

Table with 10 columns: Temp (°C), Resistance (KΩ), Temp (°C), Resistance (KΩ), Temp (°C), Resistance (KΩ), Temp (°C), Resistance (KΩ), Temp (°C), Resistance (KΩ). Rows range from -40°C to 194°C.



| Temp | Resistance | Temp | Resistance | Temp | Resistance | Temp | Resistance | Temp | Resistance |
|------|------------|------|------------|------|------------|------|------------|------|------------|
| °C | KΩ | °C | KΩ | °C | KΩ | °C | KΩ | °C | KΩ |
| 195 | 0.0706 | 211 | 0.0524 | 226 | 0.0402 | 241 | 0.0314 | 256 | 0.0248 |
| 196 | 0.0692 | 212 | 0.0514 | 227 | 0.0396 | 242 | 0.0309 | 257 | 0.0244 |
| 197 | 0.0679 | 213 | 0.0505 | 228 | 0.0389 | 243 | 0.0304 | 258 | 0.0241 |
| 198 | 0.0666 | 214 | 0.0496 | 229 | 0.0382 | 244 | 0.0299 | 259 | 0.0237 |
| 199 | 0.0654 | 215 | 0.0487 | 230 | 0.0376 | 245 | 0.0294 | 260 | 0.0234 |
| 200 | 0.0641 | 216 | 0.0479 | 231 | 0.0370 | 246 | 0.0290 | 261 | 0.0230 |
| 201 | 0.0630 | 217 | 0.0470 | 232 | 0.0364 | 247 | 0.0285 | 262 | 0.0227 |
| 202 | 0.0618 | 218 | 0.0462 | 233 | 0.0358 | 248 | 0.0280 | 263 | 0.0223 |
| 203 | 0.0606 | 219 | 0.0454 | 234 | 0.0352 | 249 | 0.0276 | 264 | 0.0220 |
| 204 | 0.0595 | 220 | 0.0446 | 235 | 0.0346 | 250 | 0.0272 | 265 | 0.0217 |
| 205 | 0.0584 | 221 | 0.0439 | 236 | 0.0340 | 251 | 0.0268 | 266 | 0.0214 |
| 206 | 0.0574 | 222 | 0.0431 | 237 | 0.0335 | 252 | 0.0264 | 267 | 0.0210 |
| 207 | 0.0563 | 223 | 0.0424 | 238 | 0.0329 | 253 | 0.0260 | 268 | 0.0207 |
| 208 | 0.0553 | 224 | 0.0416 | 239 | 0.0324 | 254 | 0.0256 | 269 | 0.0204 |
| 209 | 0.0543 | 225 | 0.0409 | 240 | 0.0319 | 255 | 0.0252 | 270 | 0.0201 |
| 210 | 0.0533 | | | | | | | | |

NOTICE

- ATI reserves the right to make changes to its products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.
- All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability. Testing and other quality control techniques are utilized to the extent ATI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.
- Customers are responsible for their applications using ATI components. In order to minimize risks associated with the customers' applications, adequate design and operating safeguards must be provided by the customers to minimize inherent or procedural hazards. ATI assumes no liability for applications assistance or customer product design.
- ATI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of ATI covering or relating to any combination, machine, or process in which such products or services might be or are used. ATI's publication of information regarding any third party's products or services does not constitute ATI's approval, warranty or endorsement thereof.
- IP (Intellectual Property) Ownership: ATI retains the ownership of full rights for special technologies and/or techniques embedded in its products, the designs for mechanics, optics, plus all modifications, improvements, and inventions made by ATI for its products and/or projects.