

Figure 1.1. The physical photo of ATTB32B

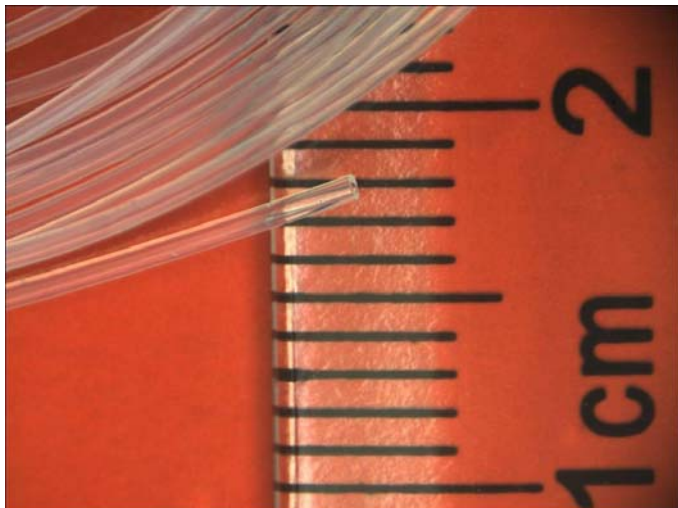


Figure 1.2. The photo of the Plastic Tubing

FEATURES

- Wide Operating Temperature Range: -234°C to 260°C
- Light Weight
- Can Be Steam or Chemically Sterilized
- Excellent Dielectric Insulation Properties
- Chemical Inert
- Corrosion Resistant
- Low Coefficient of Friction
- Flame Resistant: UL 94 VO
- Biocompatible: USP Class VI
- Indefinite Shelf Life
- Exceptional Mechanical Resistance under Severe Conditions

DESCRIPTION

The material of ATTB32B tubing is Polytetrafluoroethylene (PTFE). PTFE is a thermoplastic polymer, whose properties are gained from the aggregate effect of carbon-fluorine bonds.

PTFE's coefficient of friction is as low as 0.05 to 0.10, which is known as the third lowest of solid materials. The temperature range is from -234°C (-454°F) to 260°C (500°F). Its high melting temperature makes it suitable for use in high temperature applications. Combined with its chemical inertness and chemical resistance, PTFE outperforms glass and graphite, making it an excellent material for chemical and analytical researches and fluid transfers. It can be steam sterilized with its physical properties unaffected, such as its surface hardness, flex life and deformation under load. All these features make this PTFE tubing an excellent choice as protection from chemical contact or temperature extremes.

PTFE is translucent white in color. However, the degree of the whiteness varies from lot to lot. Colored tubing is also available. Figure 1.1 and 1.2 are the physical photos of ATTB32B.

This tubing is an extruded tubing, and the inside diameter is 0.25mm. See Table 1 below for detailed specifications. Figure 2 shows the dimensions of ATTB32B.

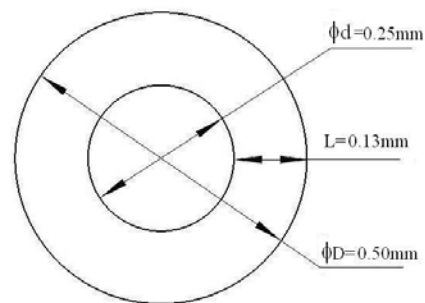


Figure 2. Mechanical dimensions of ATTB32B

APPLICATIONS

This tubing can be applied to many industries, such as chemical processing, electronic, aerospace and aviation, fiber optics, environmental and analytical. Also it can withstand corrosive fluids, such as hydrocarbon and strong mineral acids, so it can be used in fluid transfers. This tubing can be used in the leads of thermistors. When the leads are covered by the tubing, the thermistor can be used in severe environment of high temperature or chemical substances.



SPECIFICATIONS

Table 1. Characteristics

Part Number	Color	Shape	Material	Inside Diameter	Outside Diameter	Wall Thickness
ATTB32B	White translucent	Round	PTFE	0.25mm (0.010in)	0.50mm (0.020in)	0.13mm (0.005in)

ORDERING INFORMATION

Table 2. Part Number

Part #	Description
ATTB32B	Special high temperature plastic tubing with chemical inertness and corrosion resistance. The ID is 0.25mm and the wall thickness is 0.13mm.

Table 3. Unit Prices

Quantity	10 – 49 ft	50 – 249ft	250 – 999ft	≥1000 ft
ATTB32B	\$0.40/ft	\$0.32/ft	\$0.24/ft	\$0.16/ft

NOTICE

1. ATI reserves the right to make changes to its products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.
2. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability. Testing and other quality control techniques are utilized to the extent ATI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.
3. Customers are responsible for their applications using ATI products. In order to minimize risks associated with the customers' applications, adequate designs and operating safeguards must be provided by the customers to minimize inherent or procedural hazards. ATI assumes no liability for applications assistance or customer product design.
4. ATI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of ATI covering or relating to any combination, machine, or process in which such products or services might be or are used. ATI's publication of information regarding any third party's products or services does not constitute ATI's approval, warranty or endorsement thereof.
5. IP (Intellectual Property) Ownership: ATI retains the ownership of full rights for special technologies and/or techniques embedded in its products, the designs for mechanics, optics, plus all modifications, improvements, and inventions made by ATI for its products and/or projects.