

Figure 1. The Physical Photo of ATDSC2MM6P



Figure 2. ATDSC2MM6P on the Laser Driver Evaluation Board



Figure 3. ATDSC2MM6P vs. Other Socket

**FEATURE**

- Good Contact
- High Current
- High Reliability

**APPLICATION**

This DIP socket is used for DIP laser driver such as ATLSxA103D, ATLSxA104D, and ATLSxA106D.

**DESCRIPTION**

This customized DIP socket ATDSC2MM6P provides a highly reliable connection between ATI's DIP laser driver and its evaluation board. It also allows a current up to 3A.

**SPECIFICATIONS**

 Table 1. Characteristics ( $T_{\text{ambient}} = 25^{\circ}\text{C}$ )

Parameter	Value	Unit/Note
Current rating	3	A
Insulator resistance	5000	MΩ
Dielectric withstanding	500	VAC
Operating temperature	-40 ~ +105	°C
Max. soldering temperature	260°C for 3-5 seconds	
	240°C for 30-60 seconds	
Contact material	Phosphor bronze	
Insulator material	PA6T	
Plating	Gold flash	
Number of pins	6	
Unspecified tolerance	±0.20	

**MECHANICAL DIMENSIONS**

The dimensions of DIP socket ATDSC2MM6P are shown in Figure 4.

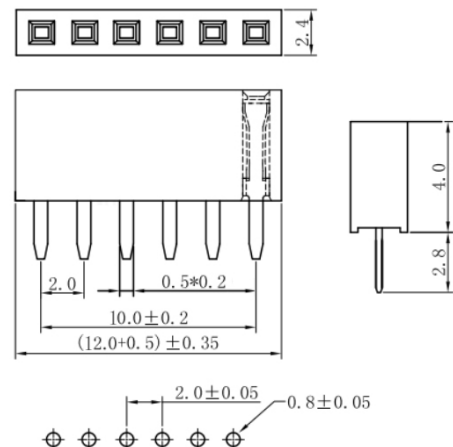


Figure 4. Mechanical Dimensions of ATDSC2MM6P

**ORDERING INFORMATION**

Table 2. Price

<b>Quantity</b>	<b>10 pairs</b>	<b>20 pairs</b>	<b>50 pairs</b>	<b>100 pairs</b>
ATDSC2MM6P	\$18	\$28	\$38	\$58

**NOTICE**

1. ATI warrants performance of its products for one year to the specifications applicable at the time of sale, except for those being damaged by excessive abuse. Products found not meeting the specifications within one year from the date of sale can be exchanged free of charge.
2. ATI reserves the right to make changes to its products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete.
3. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability. Testing and other quality control techniques are utilized to the extent ATI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.
4. Customers are responsible for their applications using ATI components. In order to minimize risks associated with the customers' applications, adequate design and operating safeguards must be provided by the customers to minimize inherent or procedural hazards. ATI assumes no liability for applications assistance or customer product design.
5. ATI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of ATI covering or relating to any combination, machine, or process in which such products or services might be or are used. ATI's publication of information regarding any third party's products or services does not constitute ATI's approval, warranty or endorsement thereof.
6. IP (Intellectual Property) Ownership: ATI retains the ownership of full rights for special technologies and/or techniques embedded in its products, the designs for mechanics, optics, plus all modifications, improvements, and inventions made by ATI for its products and/or projects.